




ara.
CERAMICS

aratilesindia@gmail.com



HEAVY DUTY

PARKING TILES


400x400MM | 12MM
500x500MM | 15MM

**SLOSH THE
TOUCH OF BEAUTY**

SURFACES DESIGNED TO ENHANCE YOUR OUTDOOR EXPERIENCE.

When you enter a place, the first thing you come across is the outdoor space that defines the decor style of the place. So, it is extremely important to design an outdoor that is welcoming and catches the eye of every onlooker.

When it comes to facades and outdoor surfaces. You need tiles that create a beautiful ambience while being highly durable to heavy wear and tear and the 400x400mm tiles provide you just that. The various designs in this size of tiles enhance the decor of the outdoor areas.

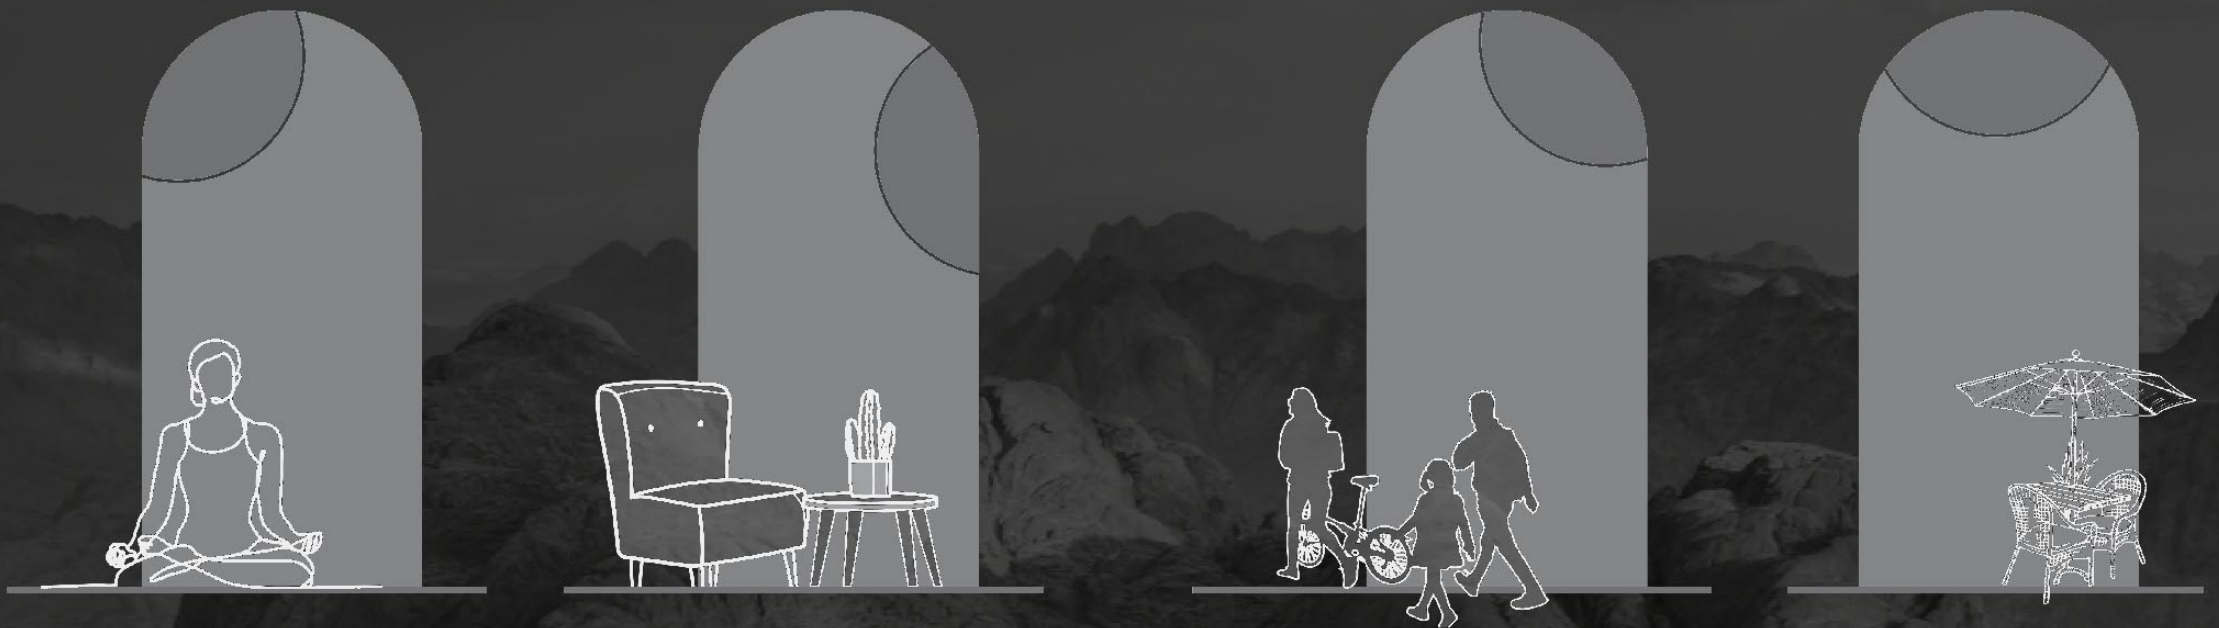

APPLICATION

COMMERCIAL SPACES

Hotels, Lounges, Malls, Airports, Boutiques, Office, Hospital, Commercial Service Buildings.

RESIDENTIAL SPACES

Flats, Villas, Community Housing Complexes, Patios, Terraces,

INDUSTRIAL SPACES

Factories, Warehouses, Workshops, Facades



Gardens



Pathways



Urban Areas



Terraces




Beachs



Parking Areas



400X400MM | Digital Vitrified Parking Tiles |

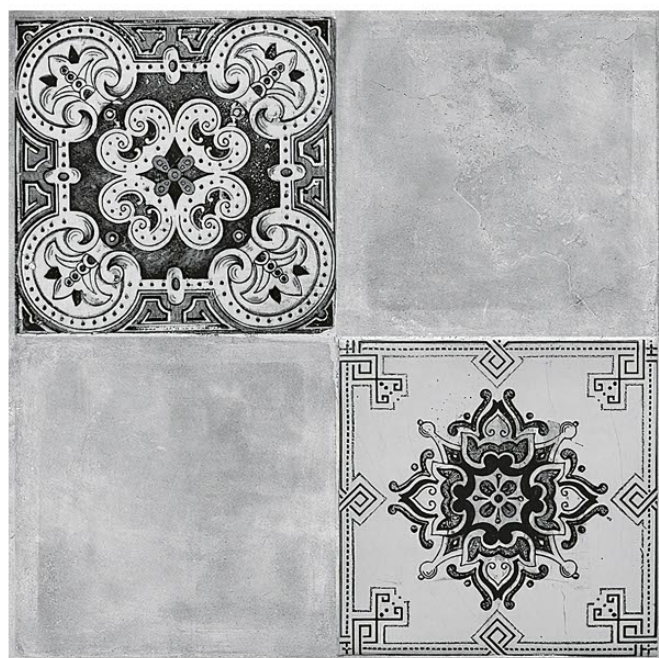

6000





400X400MM | Digital Vitrified Parking Tiles |



6003






400X400MM | Digital Vitrified Parking Tiles |



6004

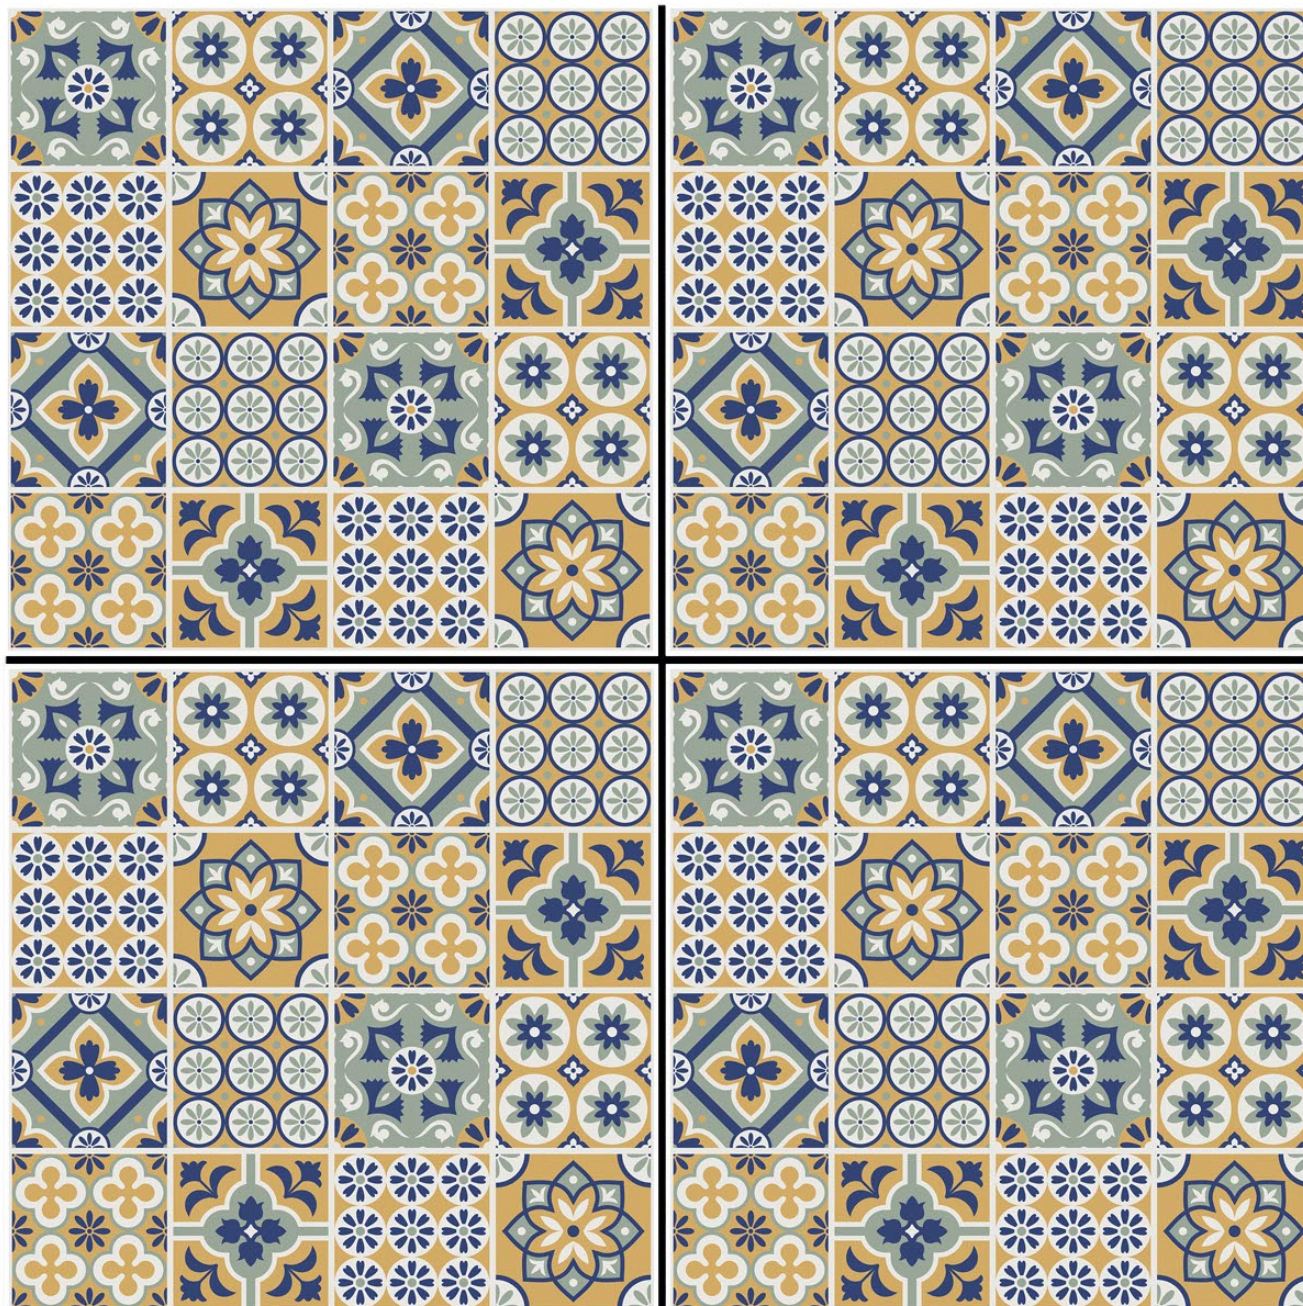




400X400MM | Digital Vitrified Parking Tiles |



6005

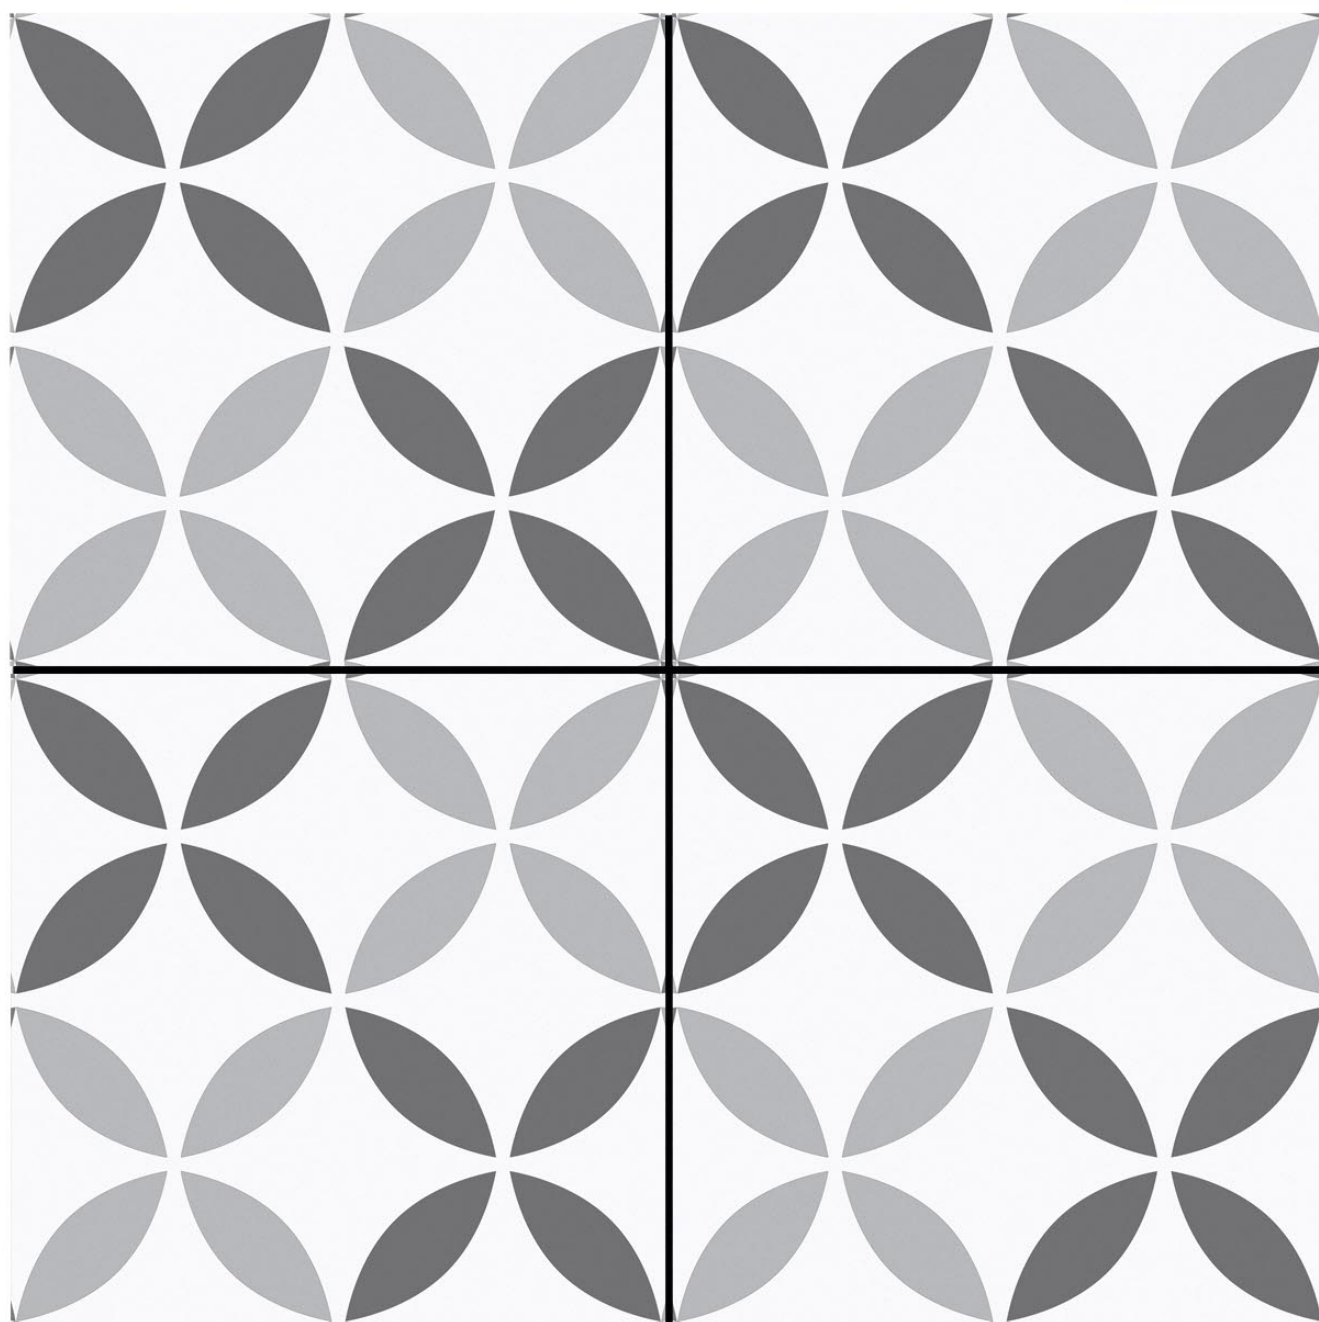



400X400MM | Digital Vitrified Parking Tiles |



6006






400X400MM | Digital Vitrified Parking Tiles |




6007



400X400MM | Digital Vitrified Parking Tiles |

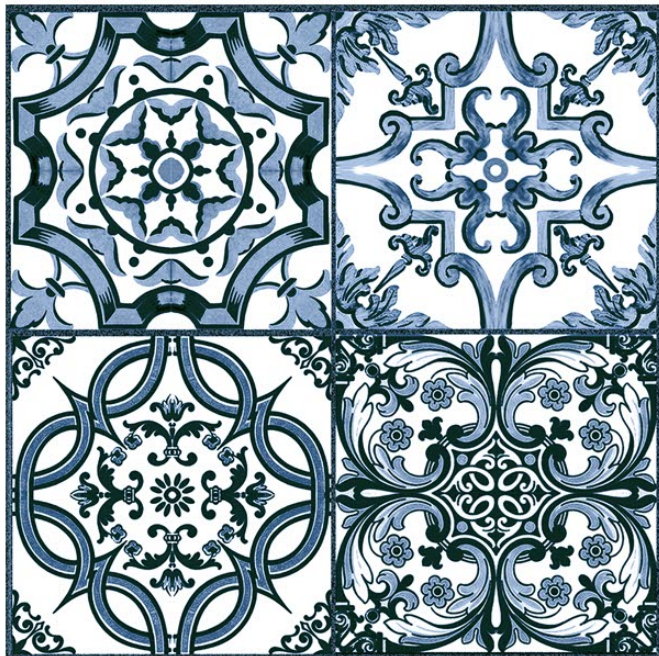

6008

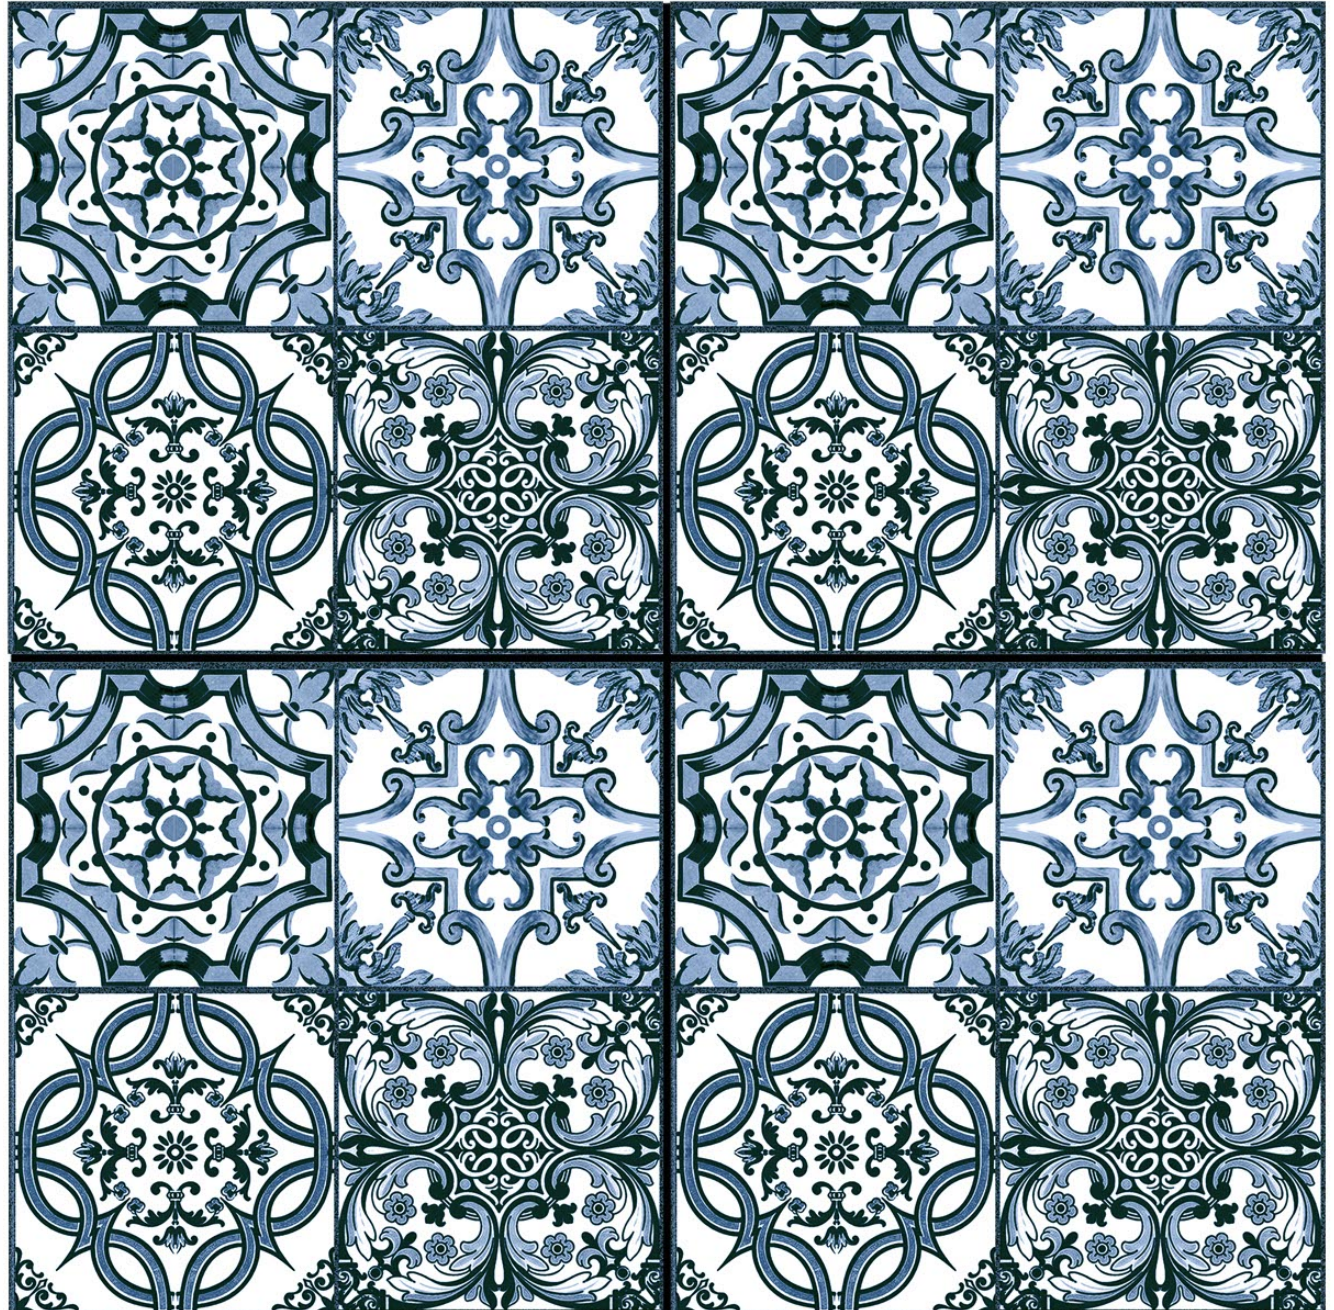




400X400MM | Digital Vitrified Parking Tiles |



6009

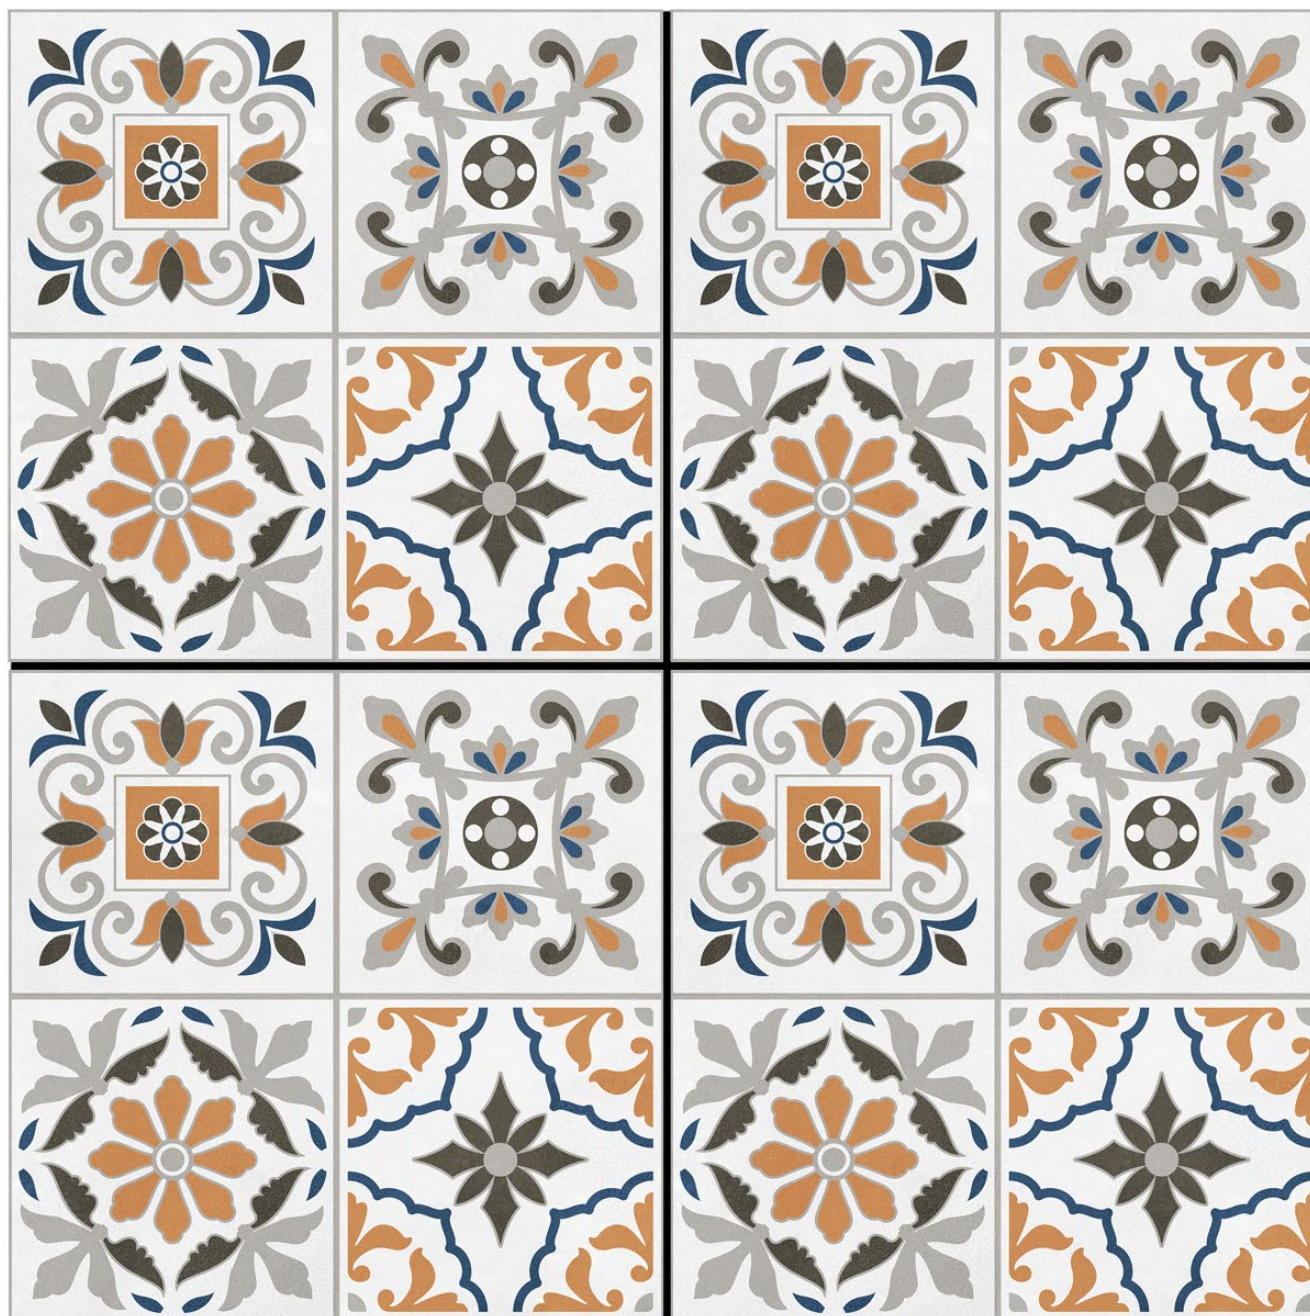




400X400MM | Digital Vitrified Parking Tiles |




6010

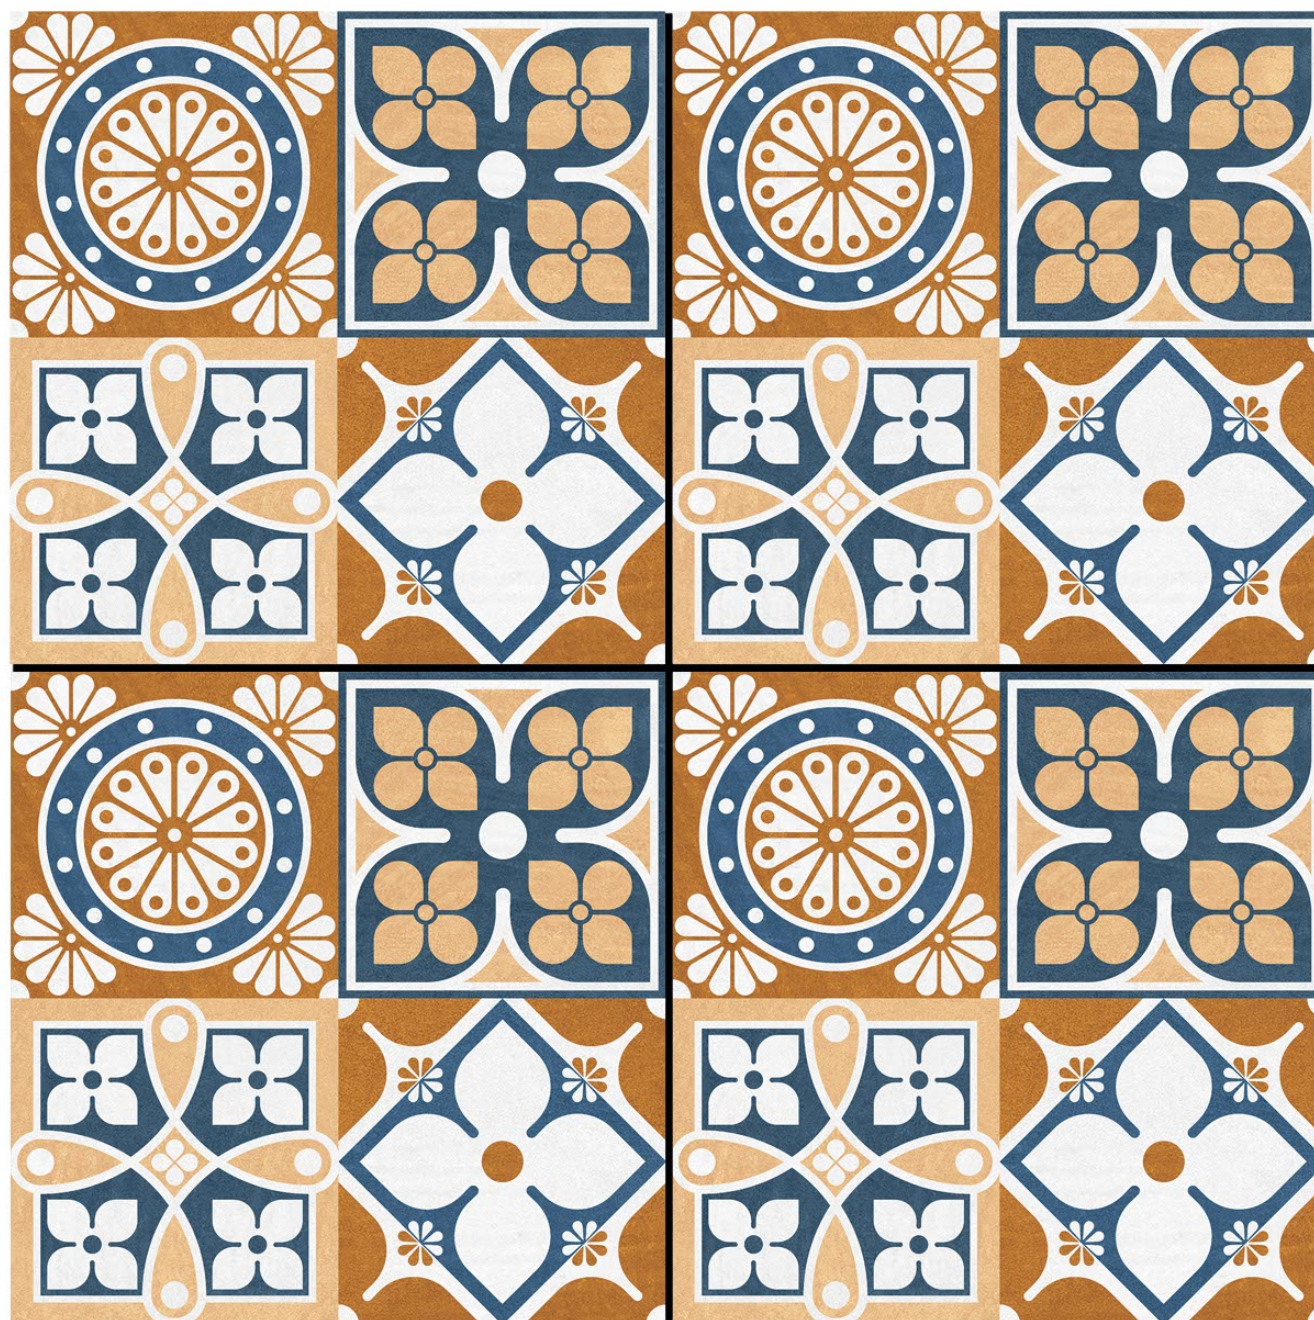



400X400MM | Digital Vitrified Parking Tiles |

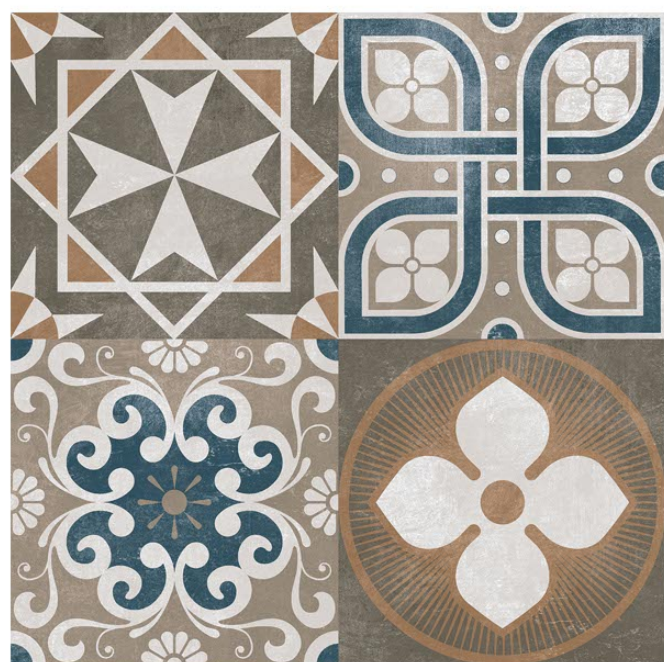

6011





400X400MM | Digital Vitrified Parking Tiles |



6012





400X400MM | Digital Vitrified Parking Tiles |



6013





400X400MM | Digital Vitrified Parking Tiles |



6014






400X400MM | Digital Vitrified Parking Tiles |



6015

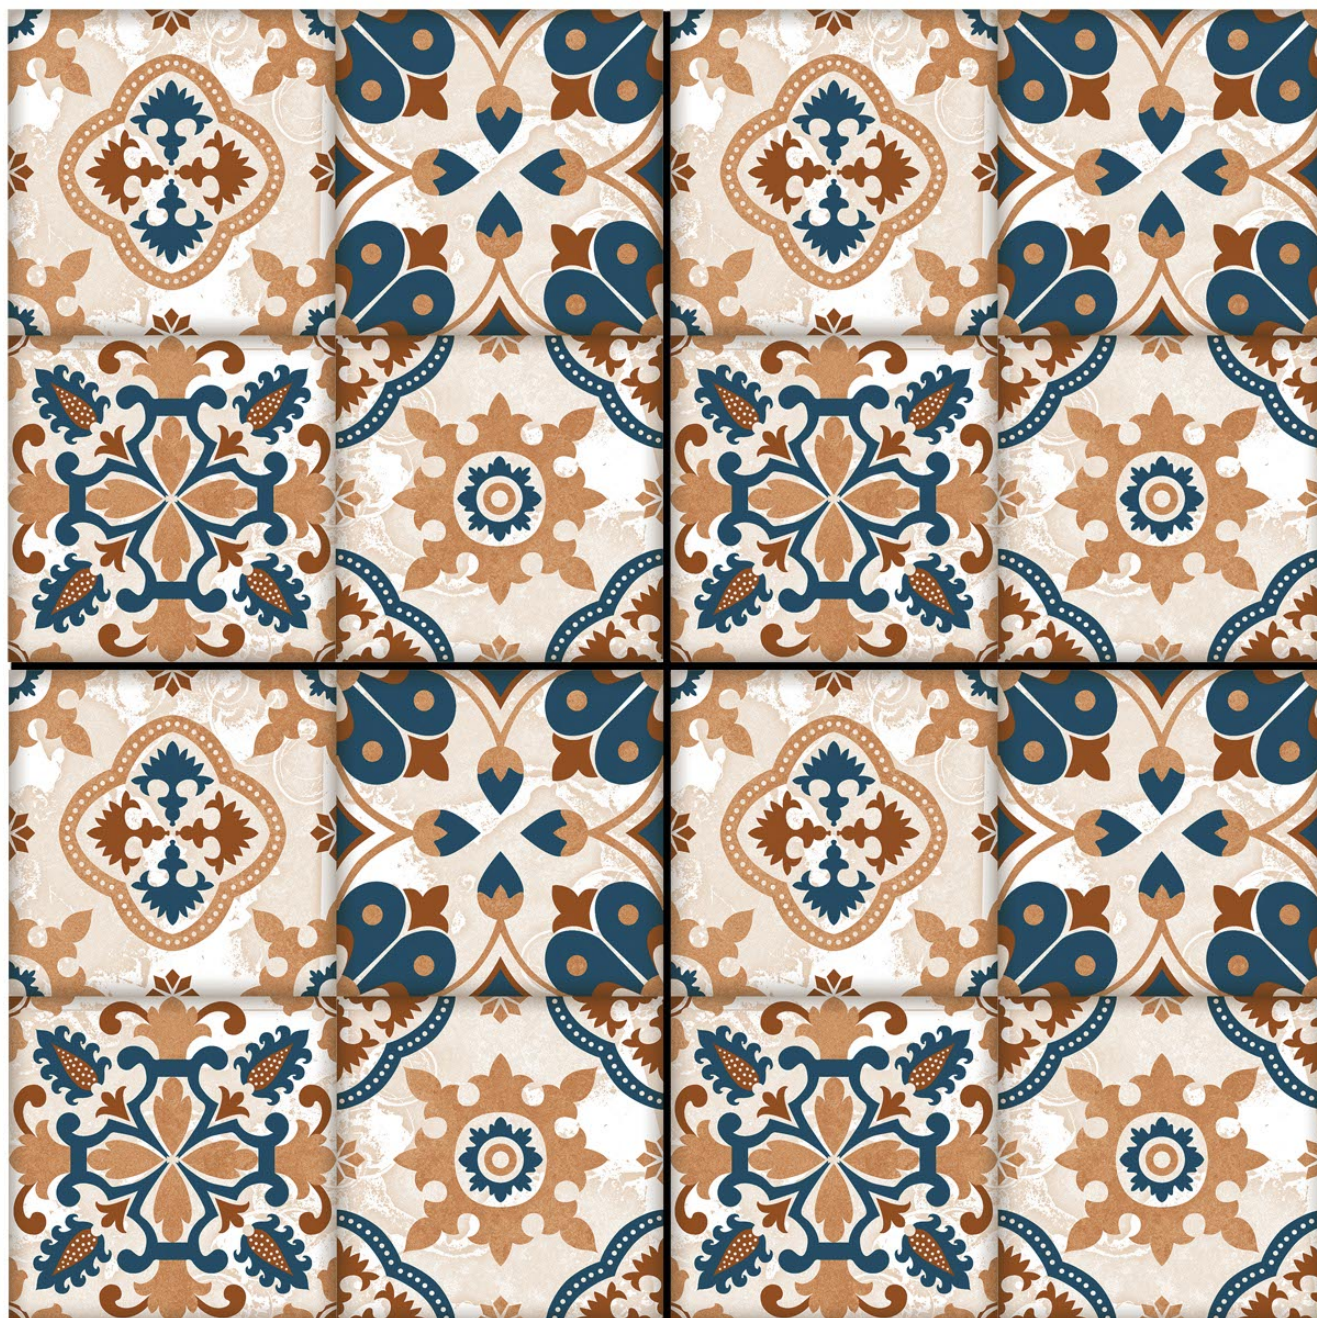




400X400MM | Digital Vitrified Parking Tiles |



6016

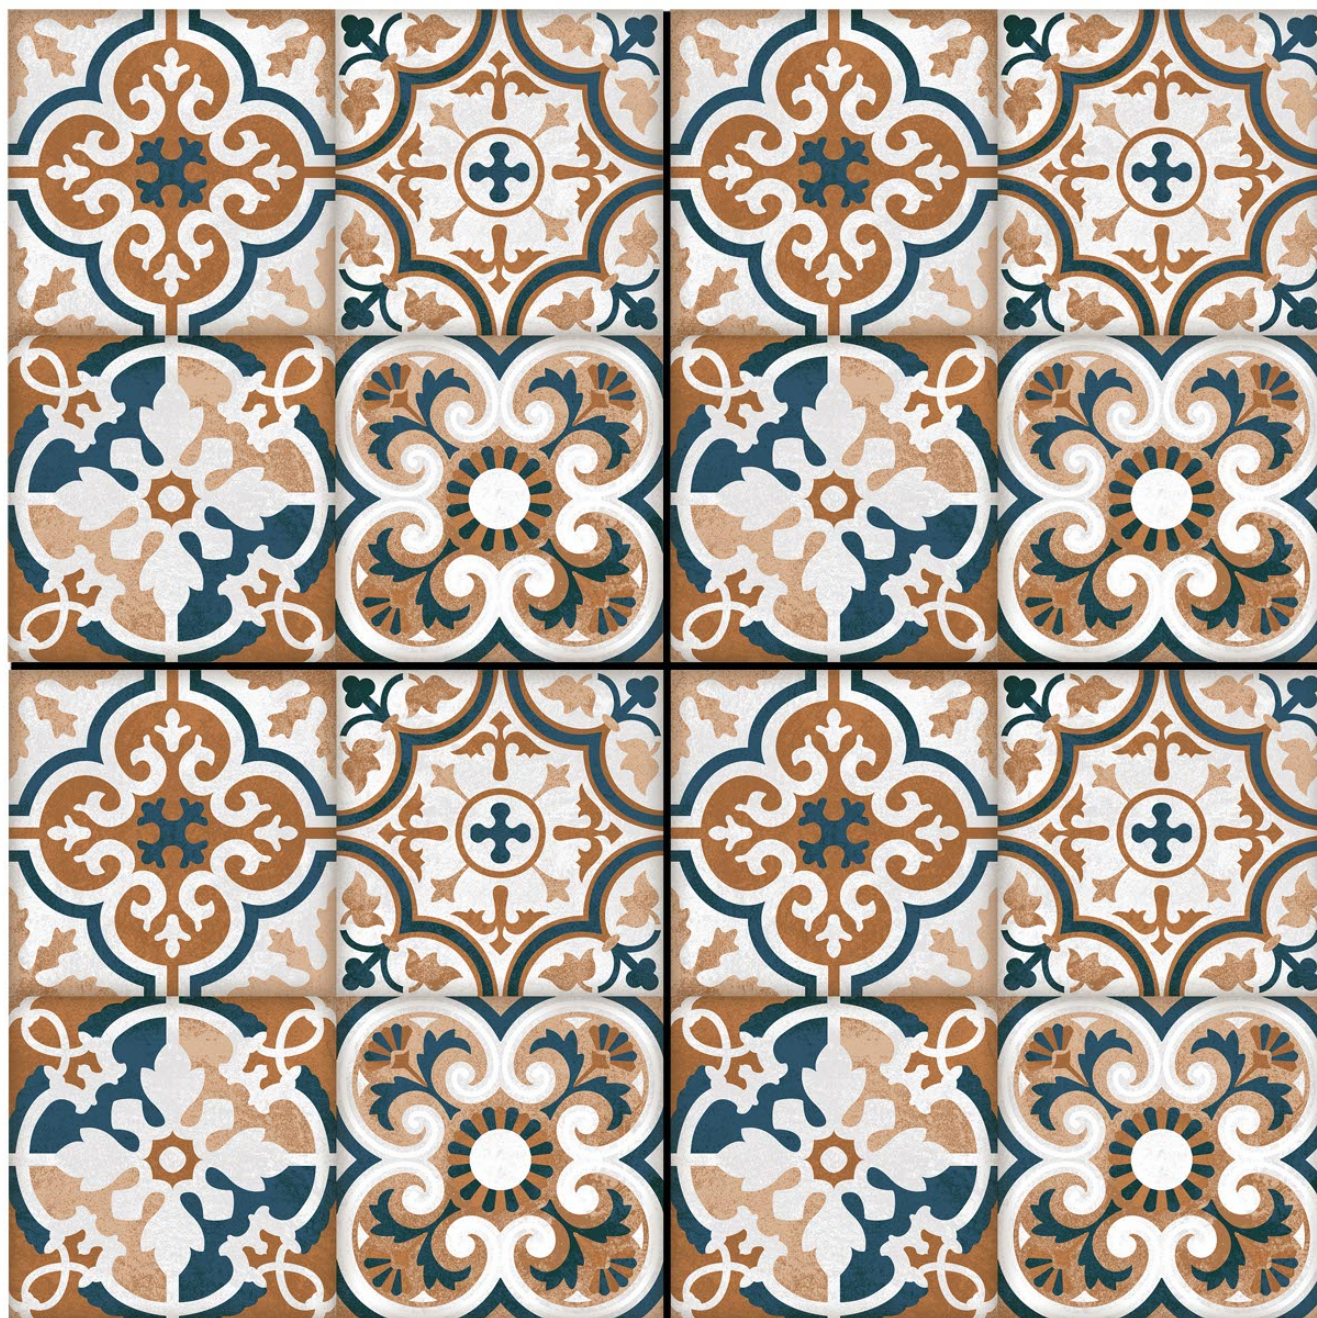




400X400MM | Digital Vitrified Parking Tiles |



6017

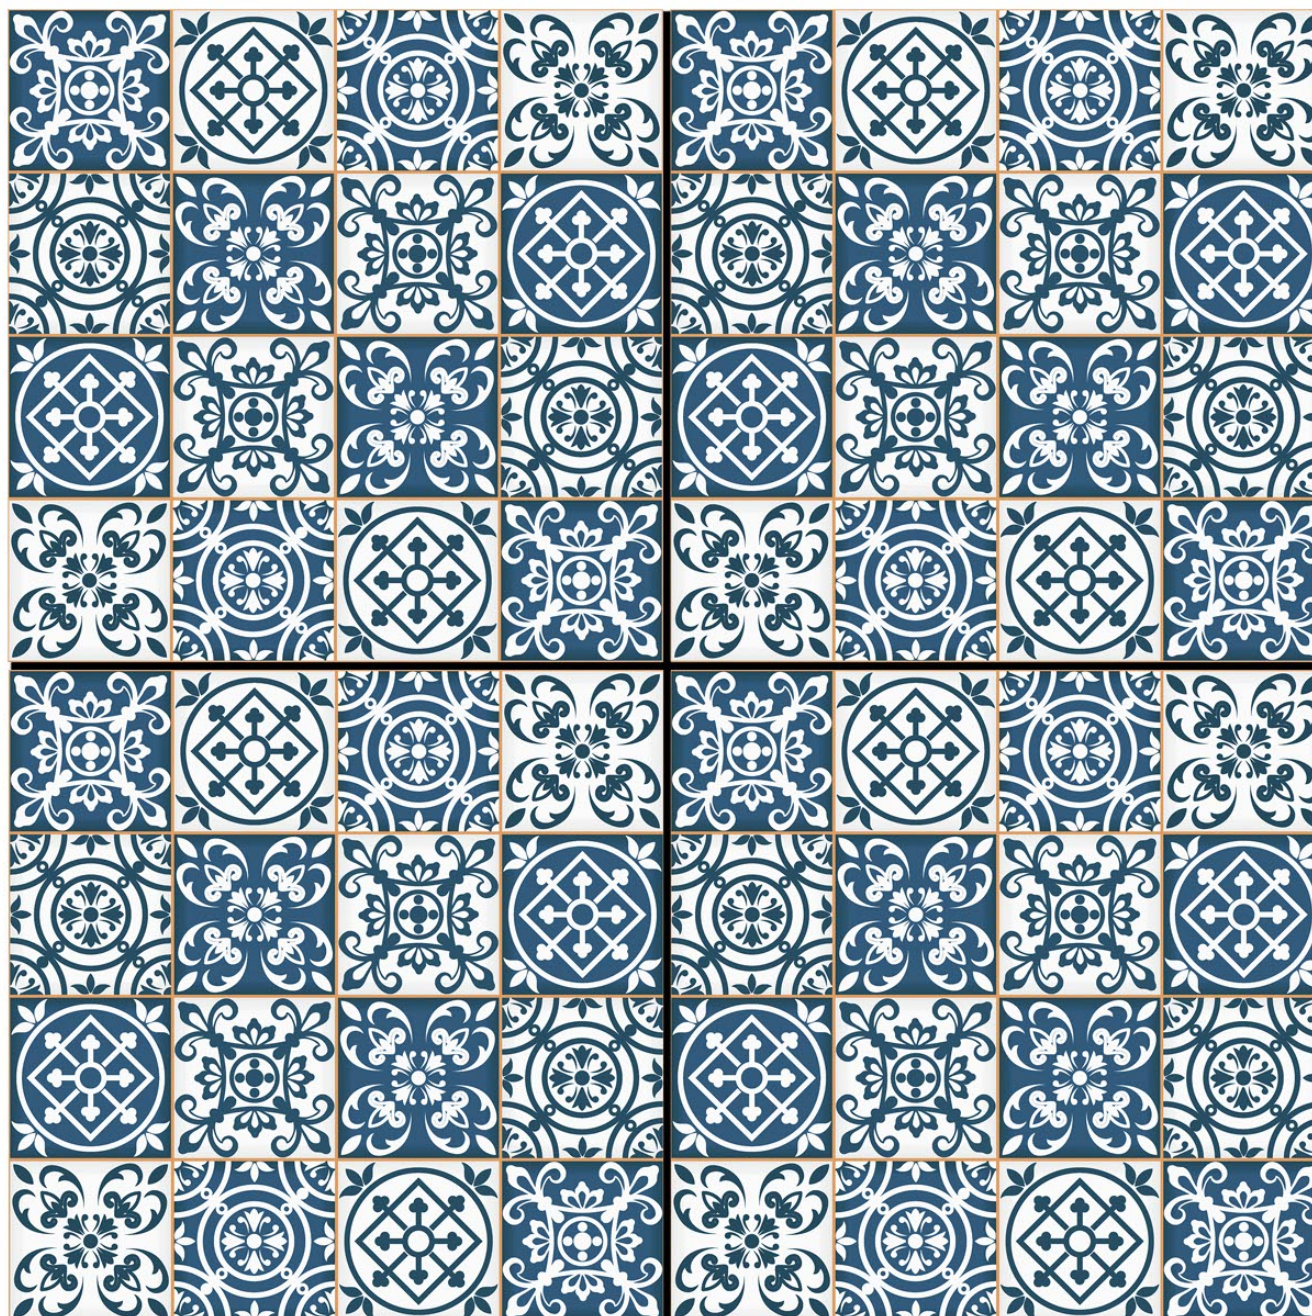




400X400MM | Digital Vitrified Parking Tiles |



6018

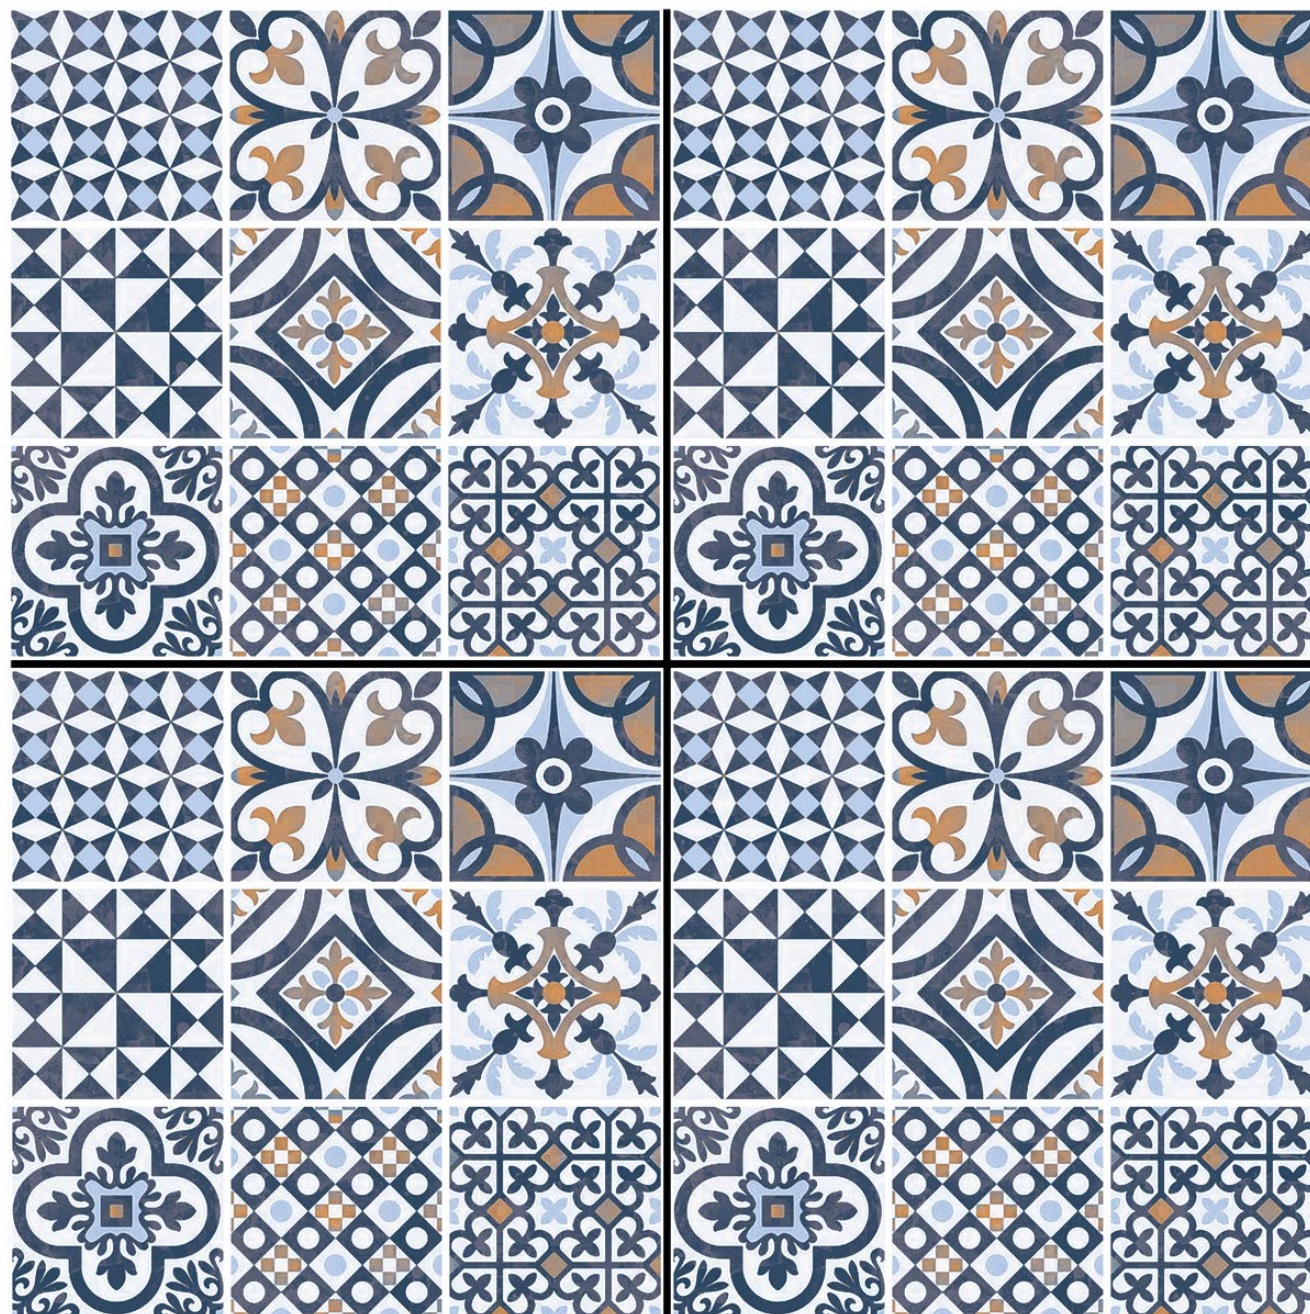



400X400MM | Digital Vitrified Parking Tiles |



6019






400X400MM | Digital Vitrified Parking Tiles |



6020

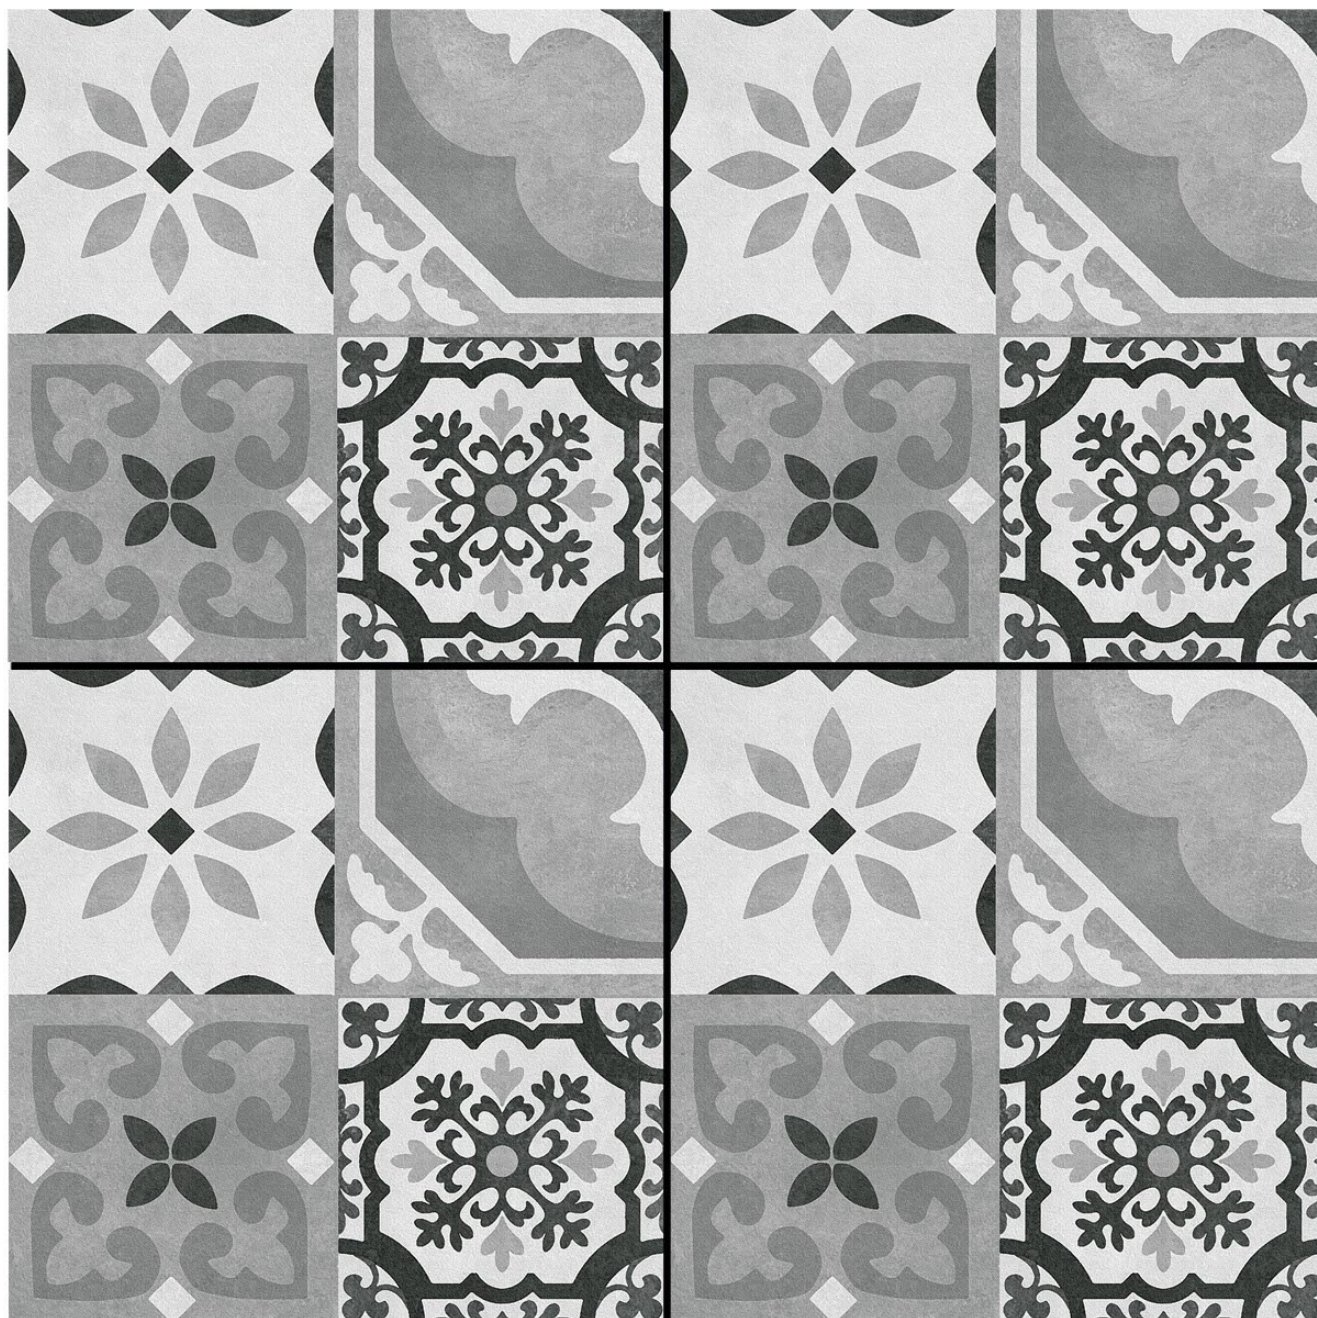




400X400MM | Digital Vitrified Parking Tiles |



6021

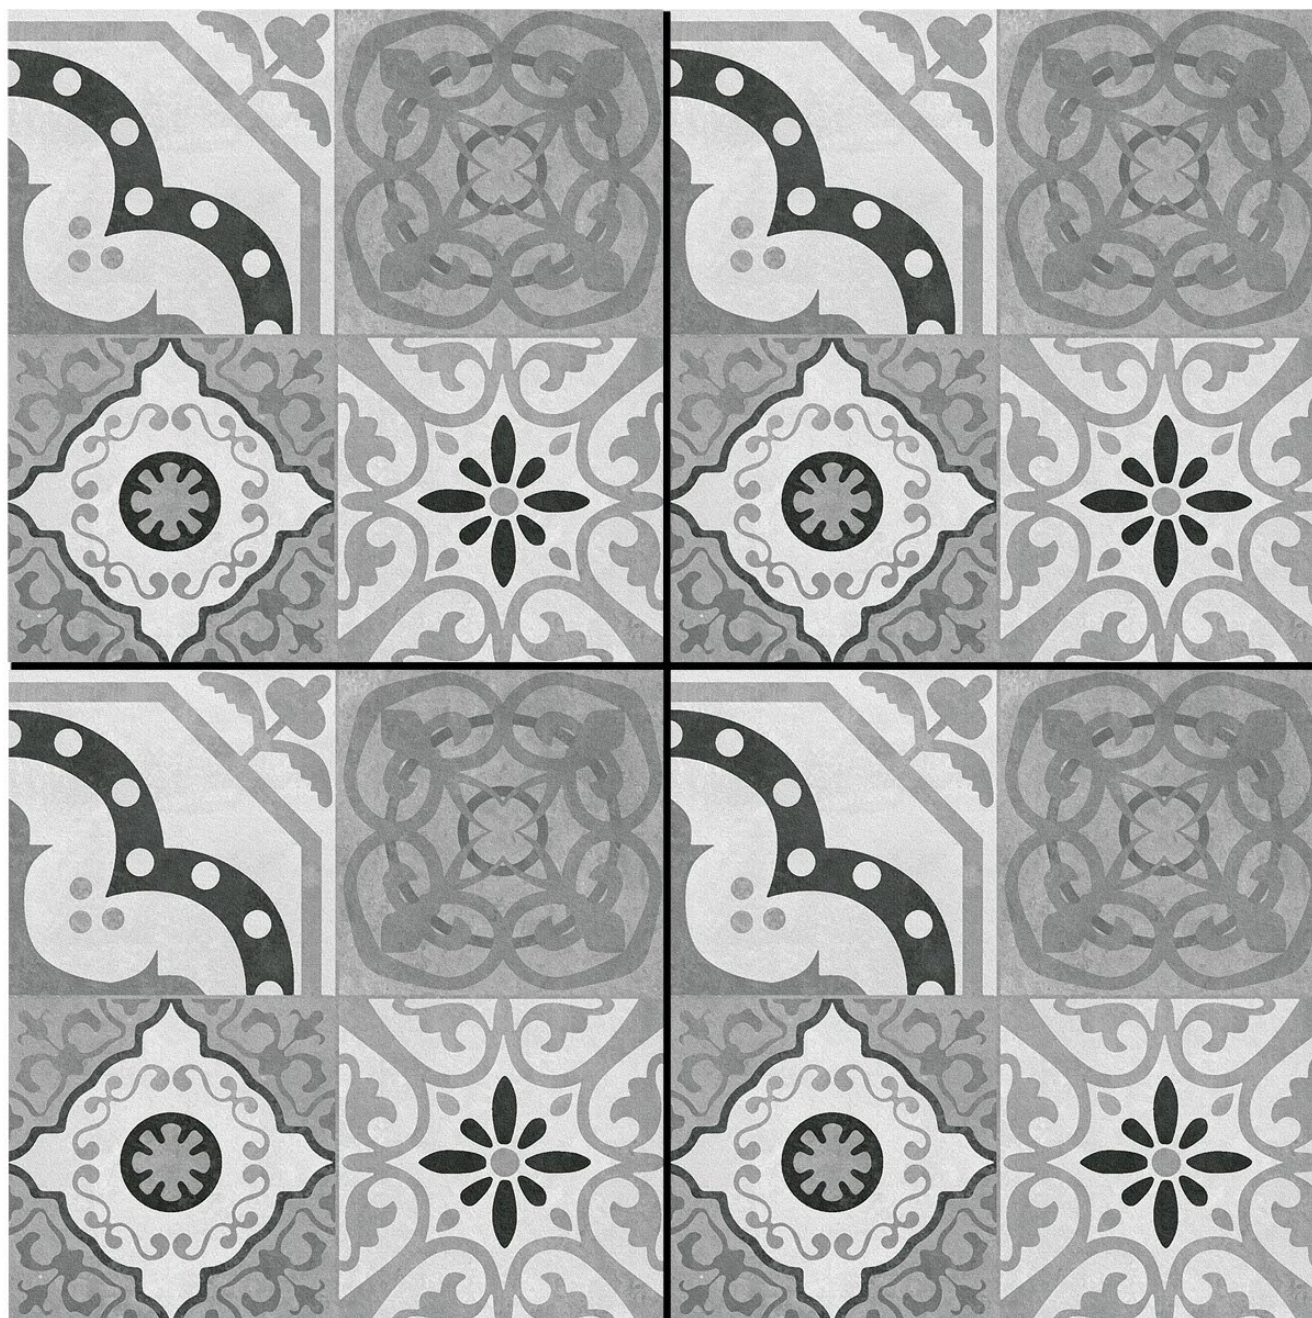



400X400MM | Digital Vitrified Parking Tiles |




6022



400X400MM | Digital Vitrified Parking Tiles |



6023

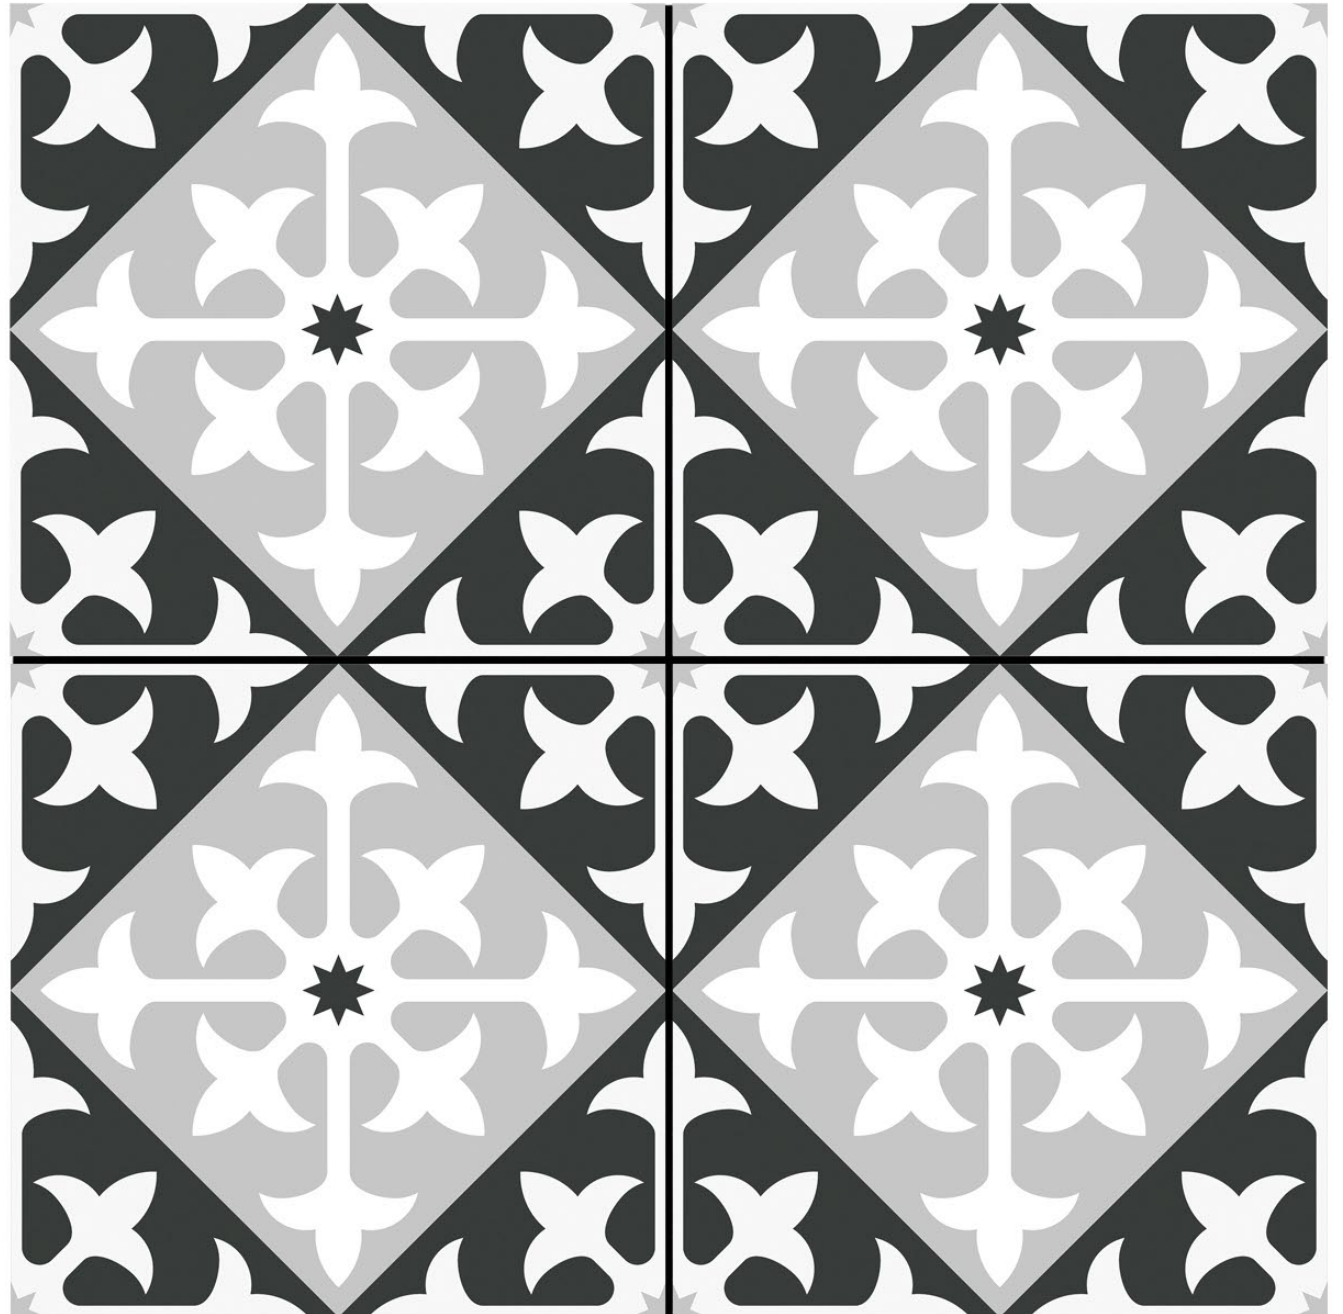




400X400MM | Digital Vitrified Parking Tiles |



6024

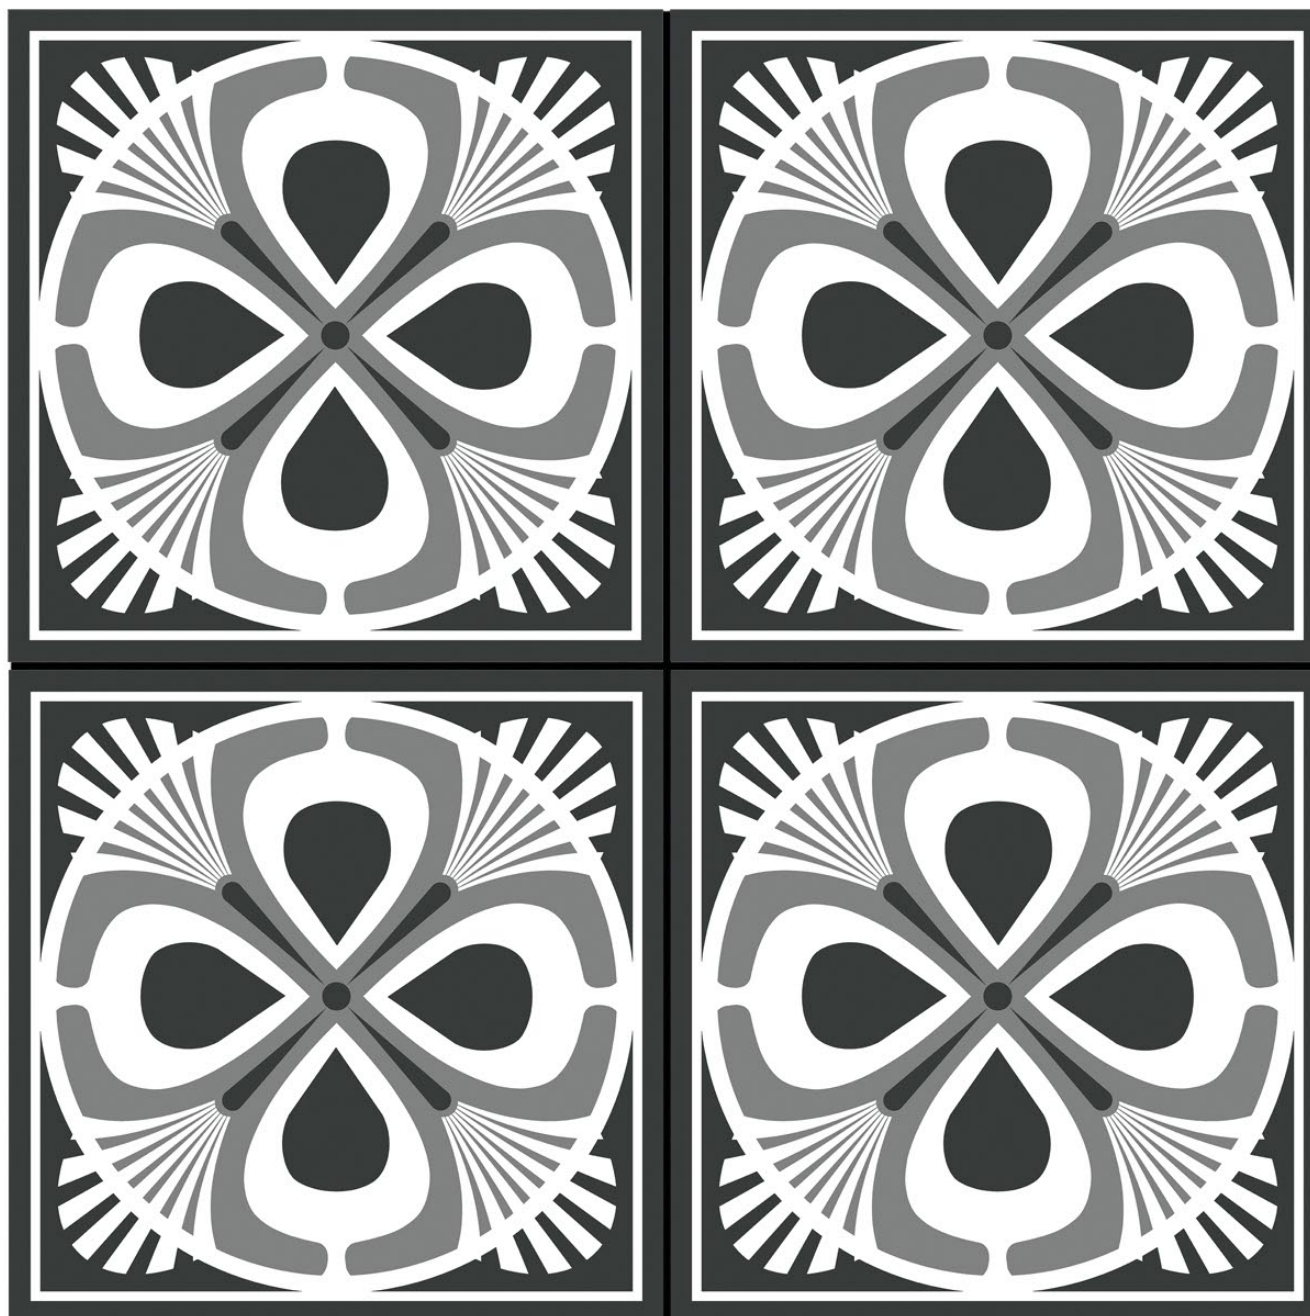




400X400MM | Digital Vitrified Parking Tiles |



6025

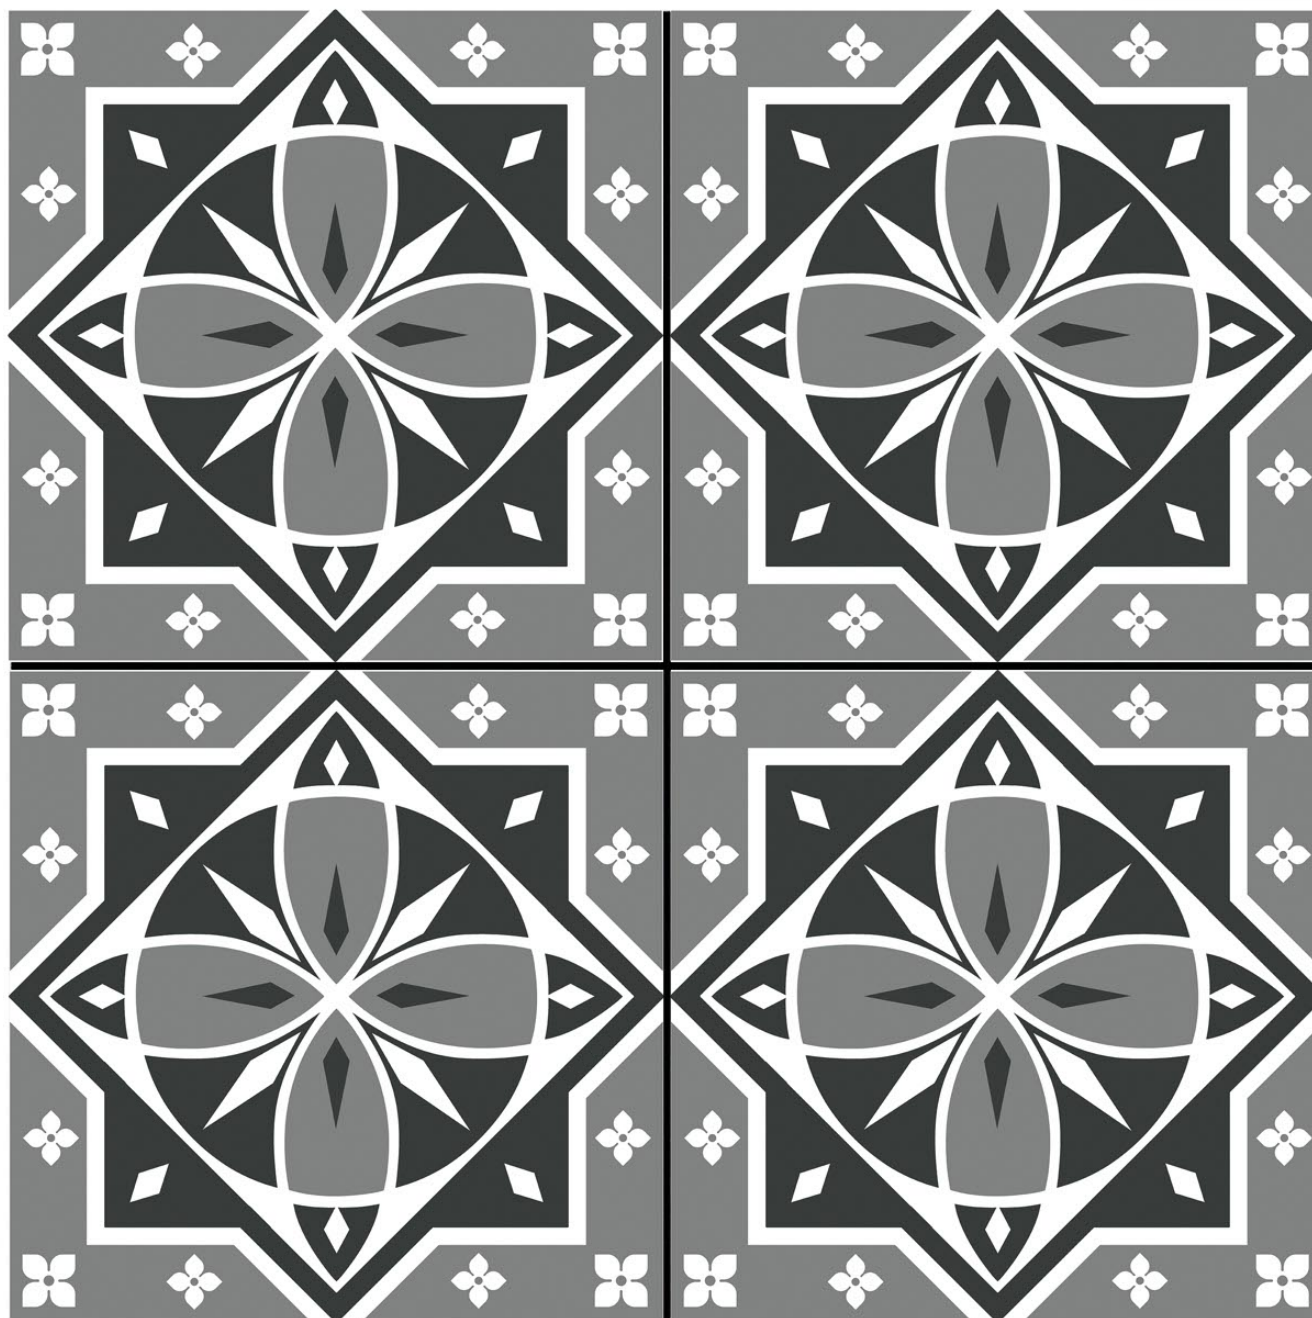




400X400MM | Digital Vitrified Parking Tiles |




6026

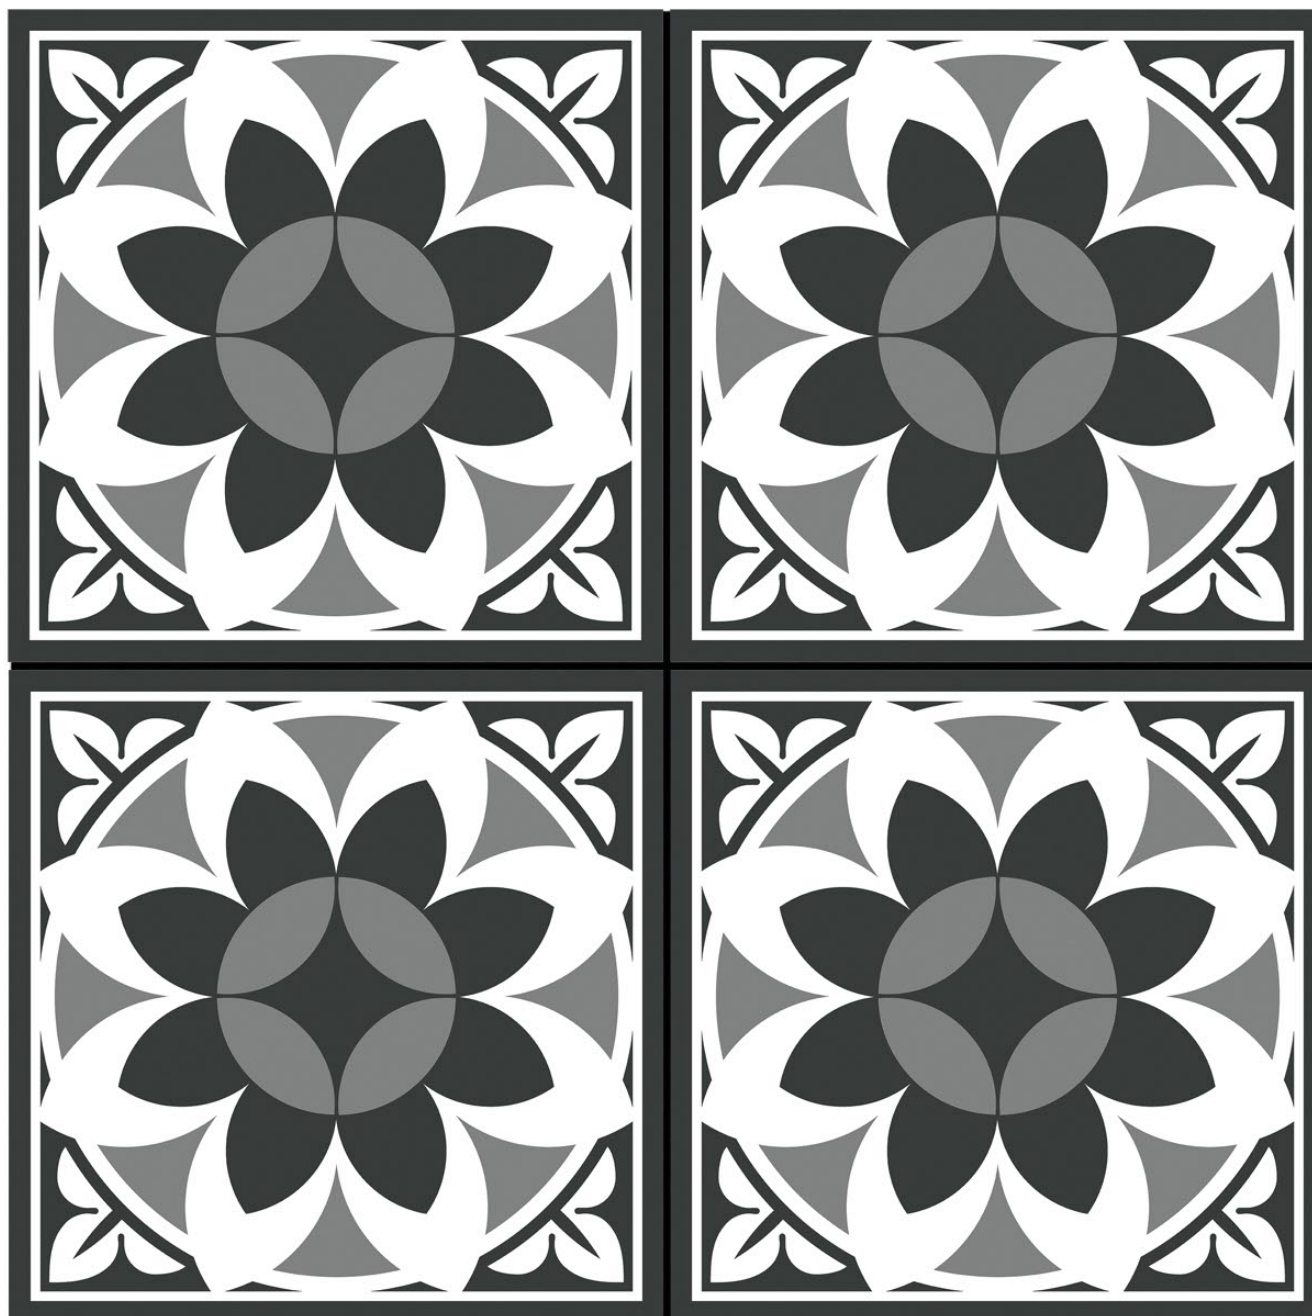




400X400MM | Digital Vitrified Parking Tiles |

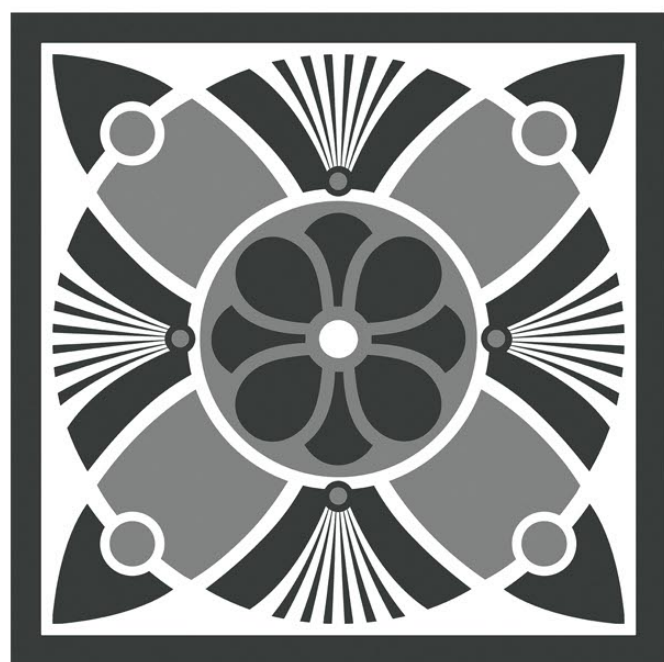


6027

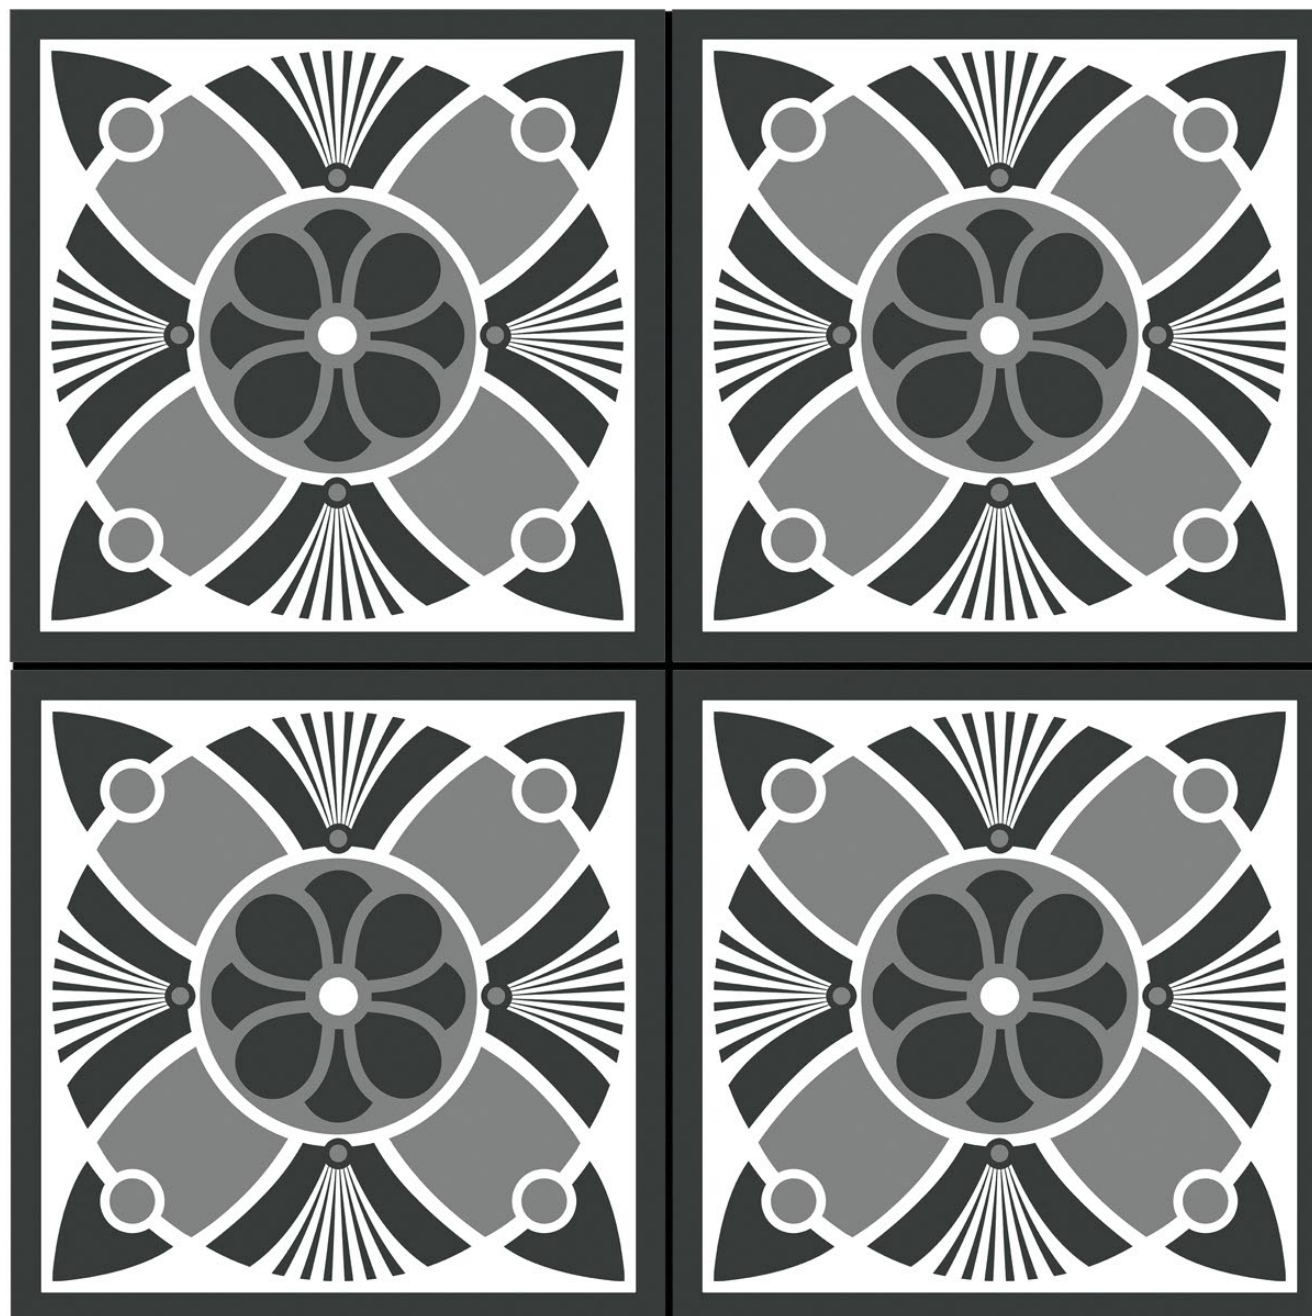




400X400MM | Digital Vitrified Parking Tiles |

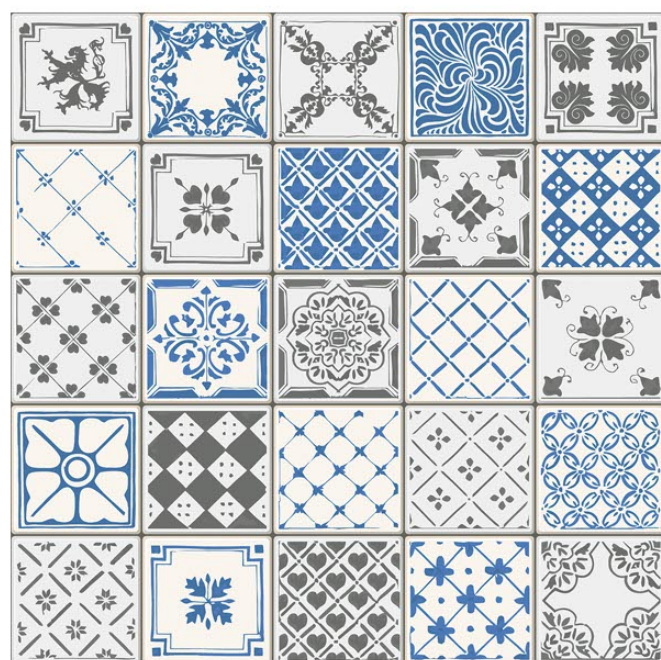


6028

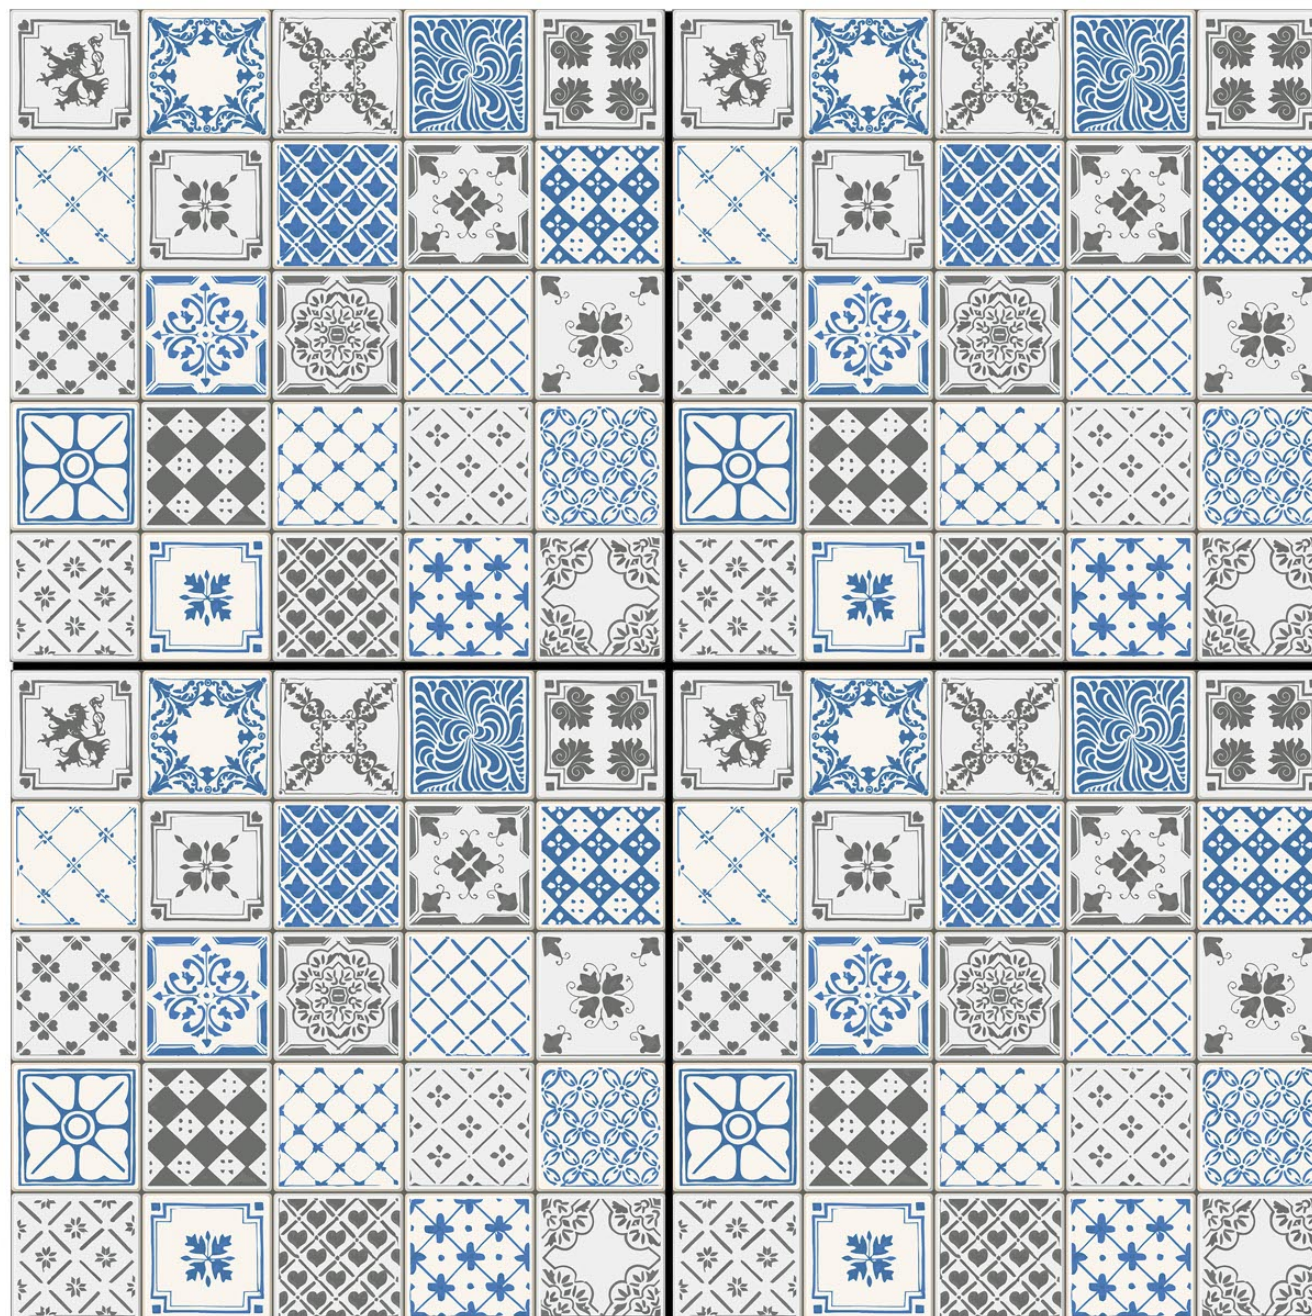




400X400MM | Digital Vitrified Parking Tiles |

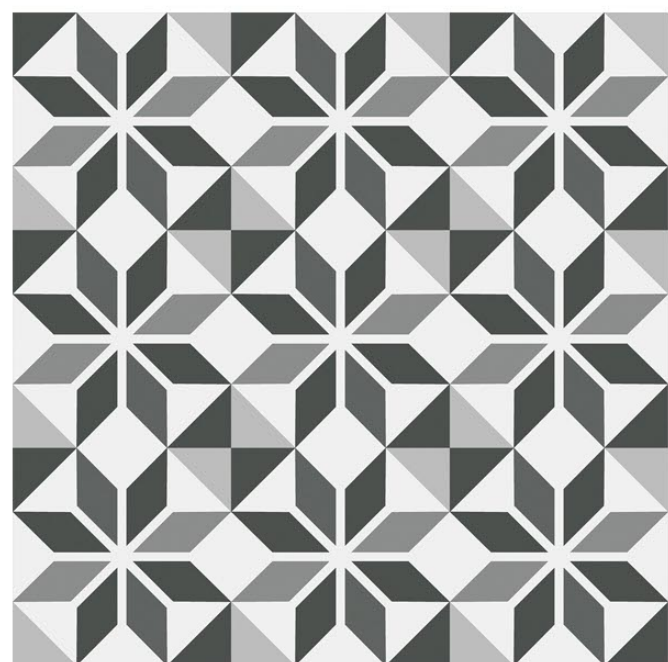

6029

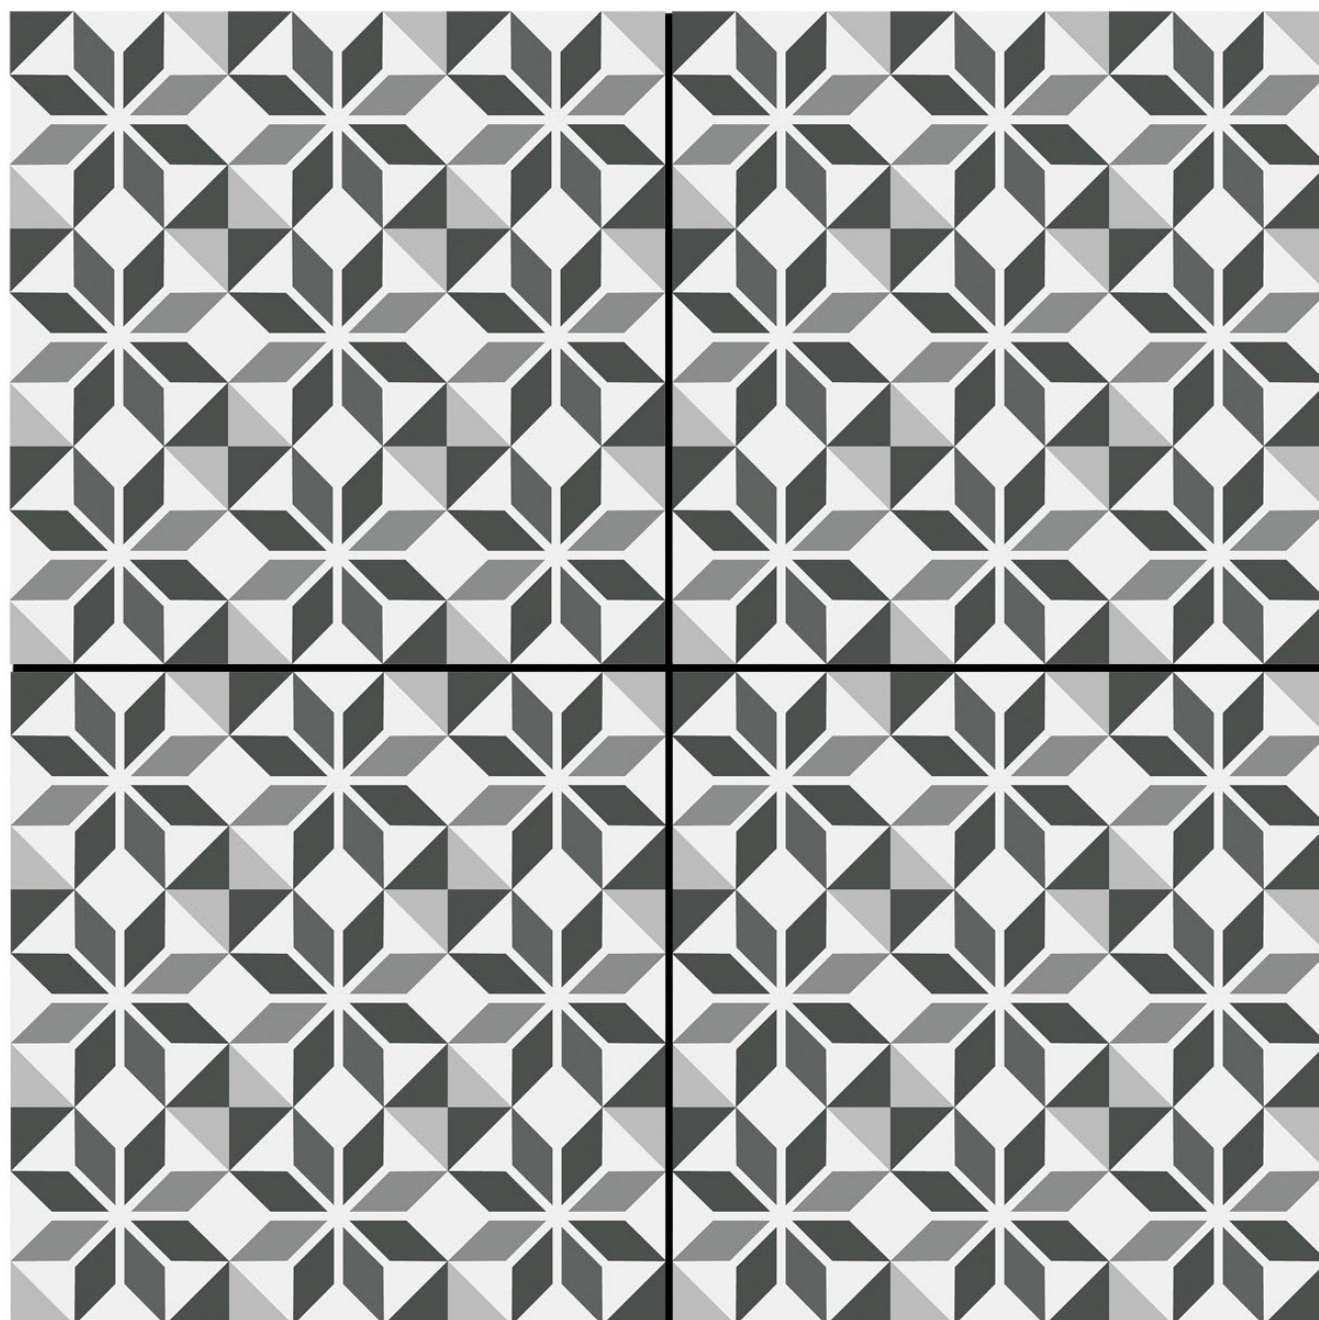



400X400MM | Digital Vitrified Parking Tiles |




6030





400X400MM | Digital Vitrified Parking Tiles |

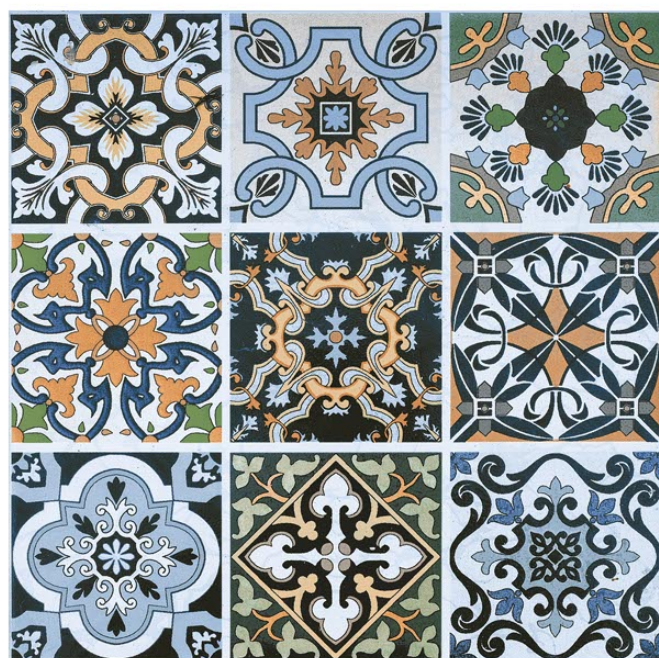

6031






400X400MM | Digital Vitrified Parking Tiles |




6032

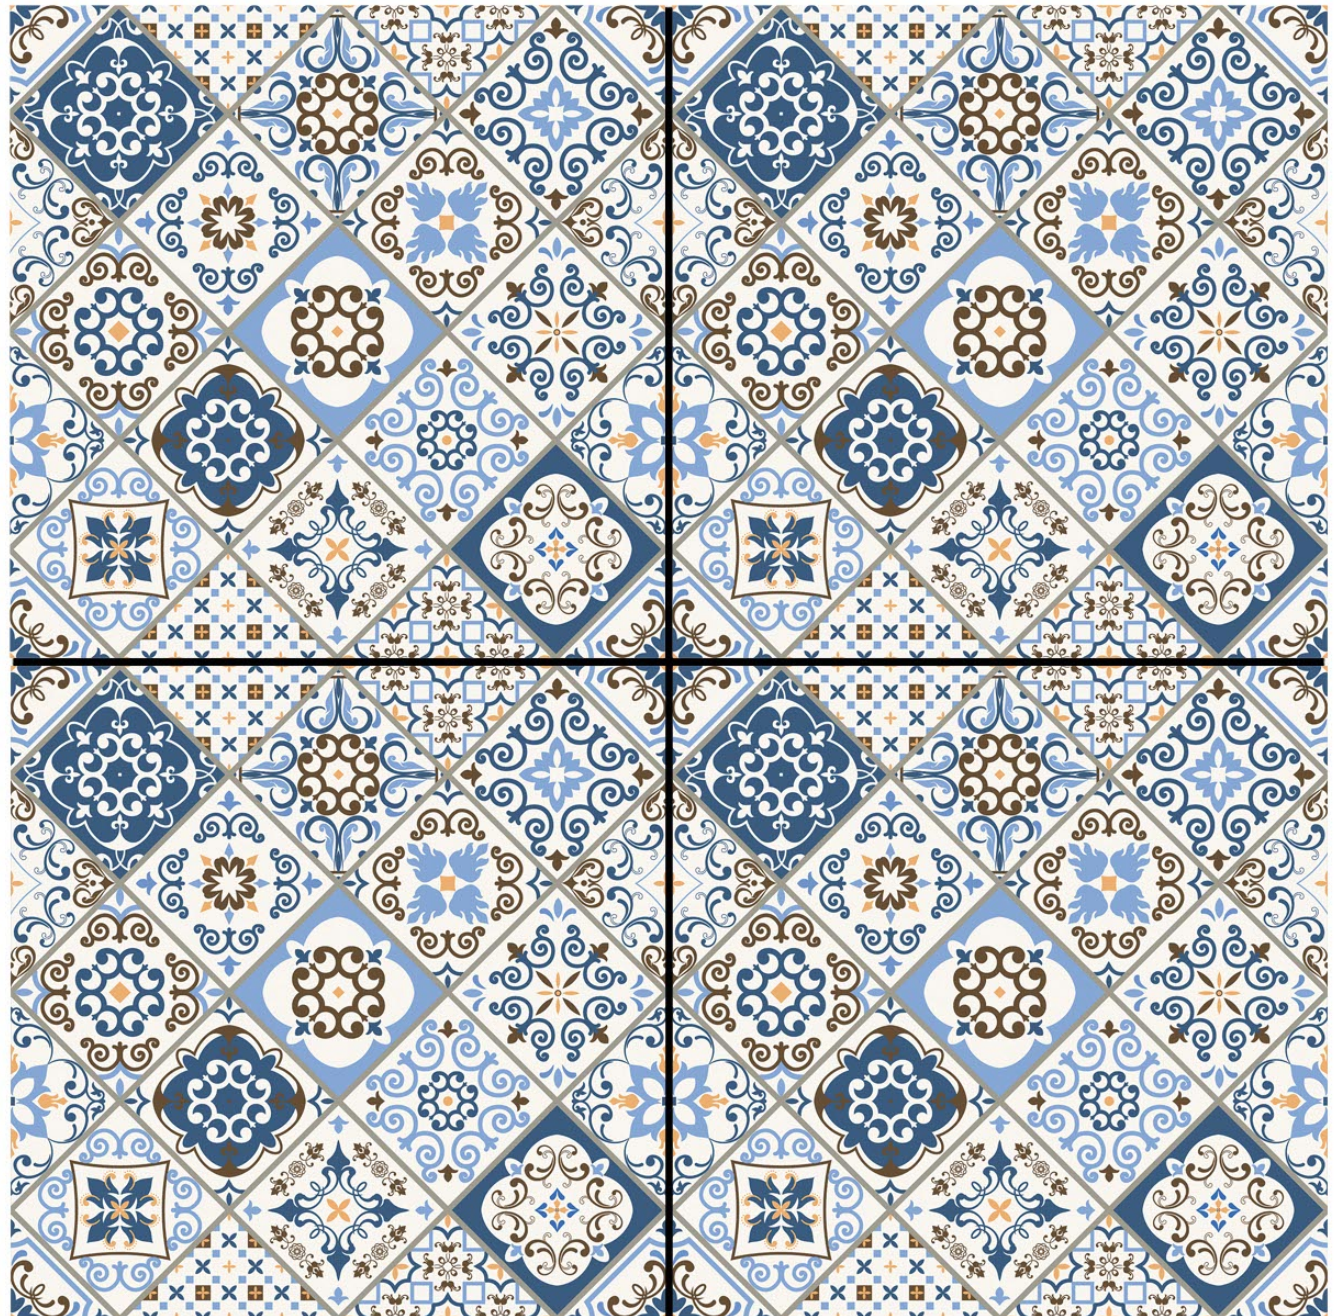




400X400MM | Digital Vitrified Parking Tiles |

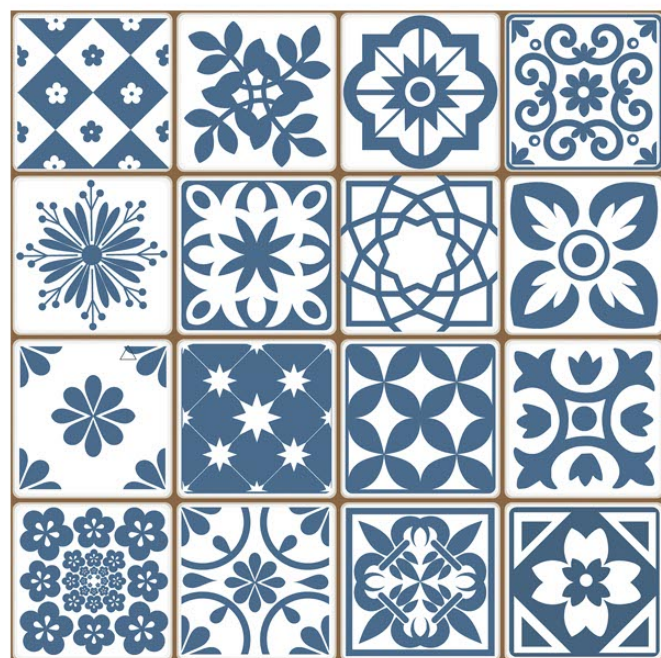

6033

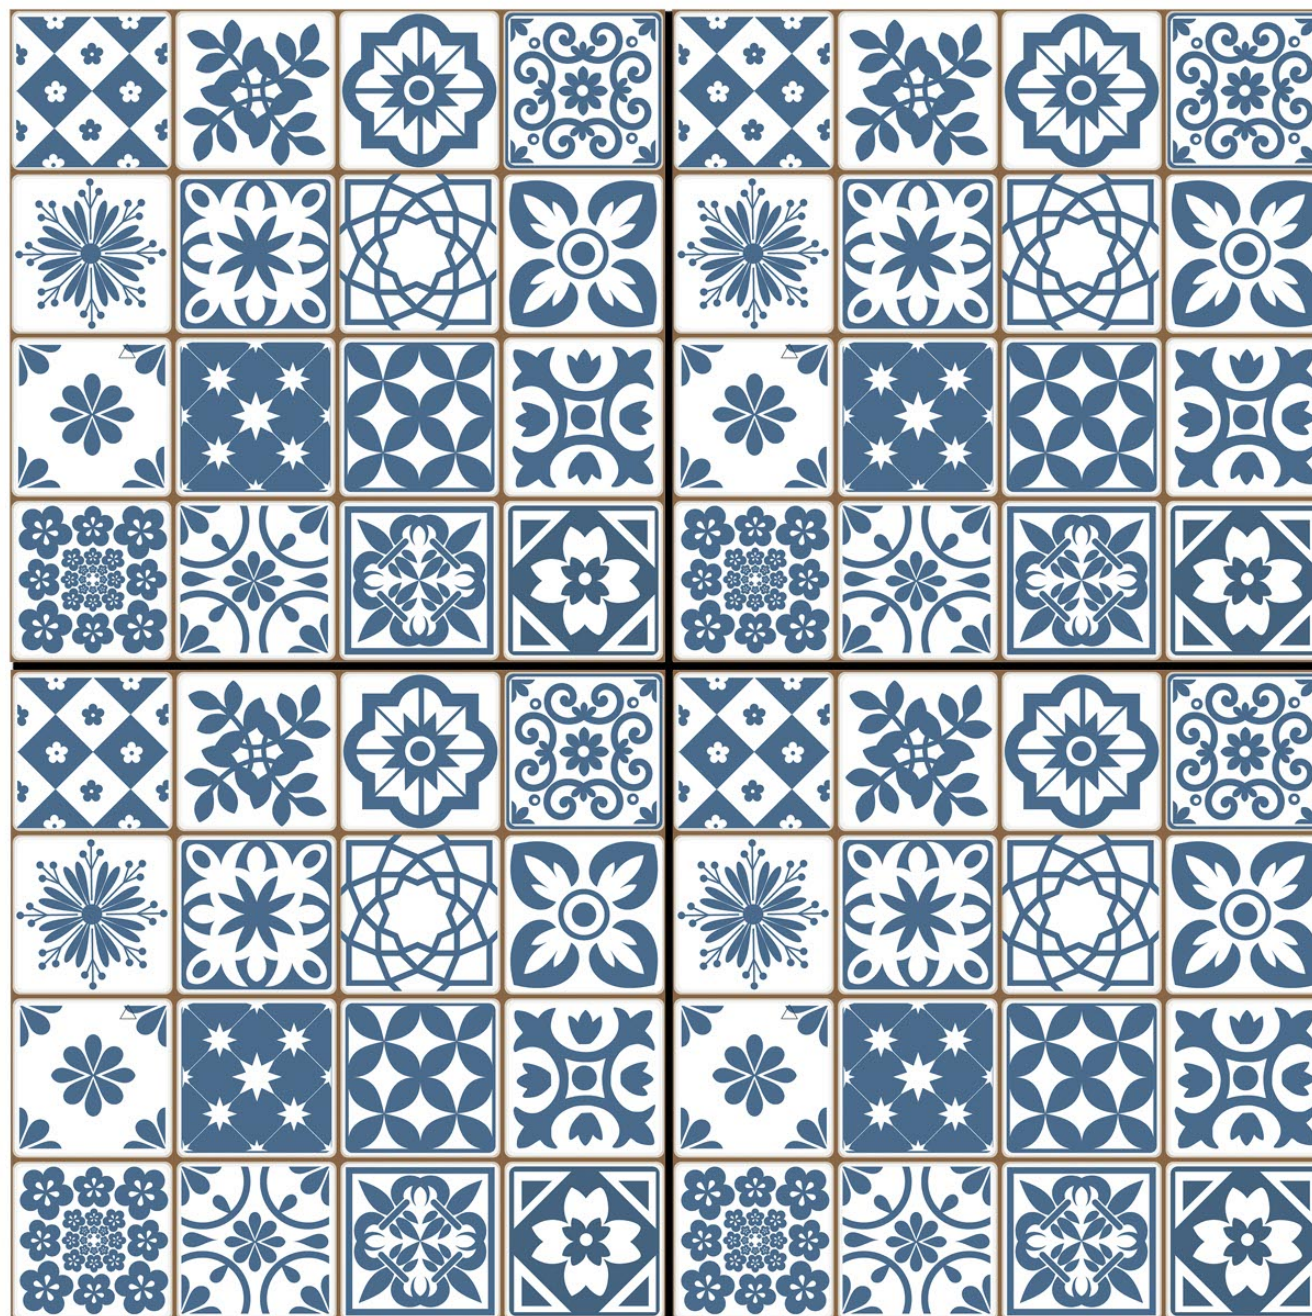




400X400MM | Digital Vitrified Parking Tiles |



6034

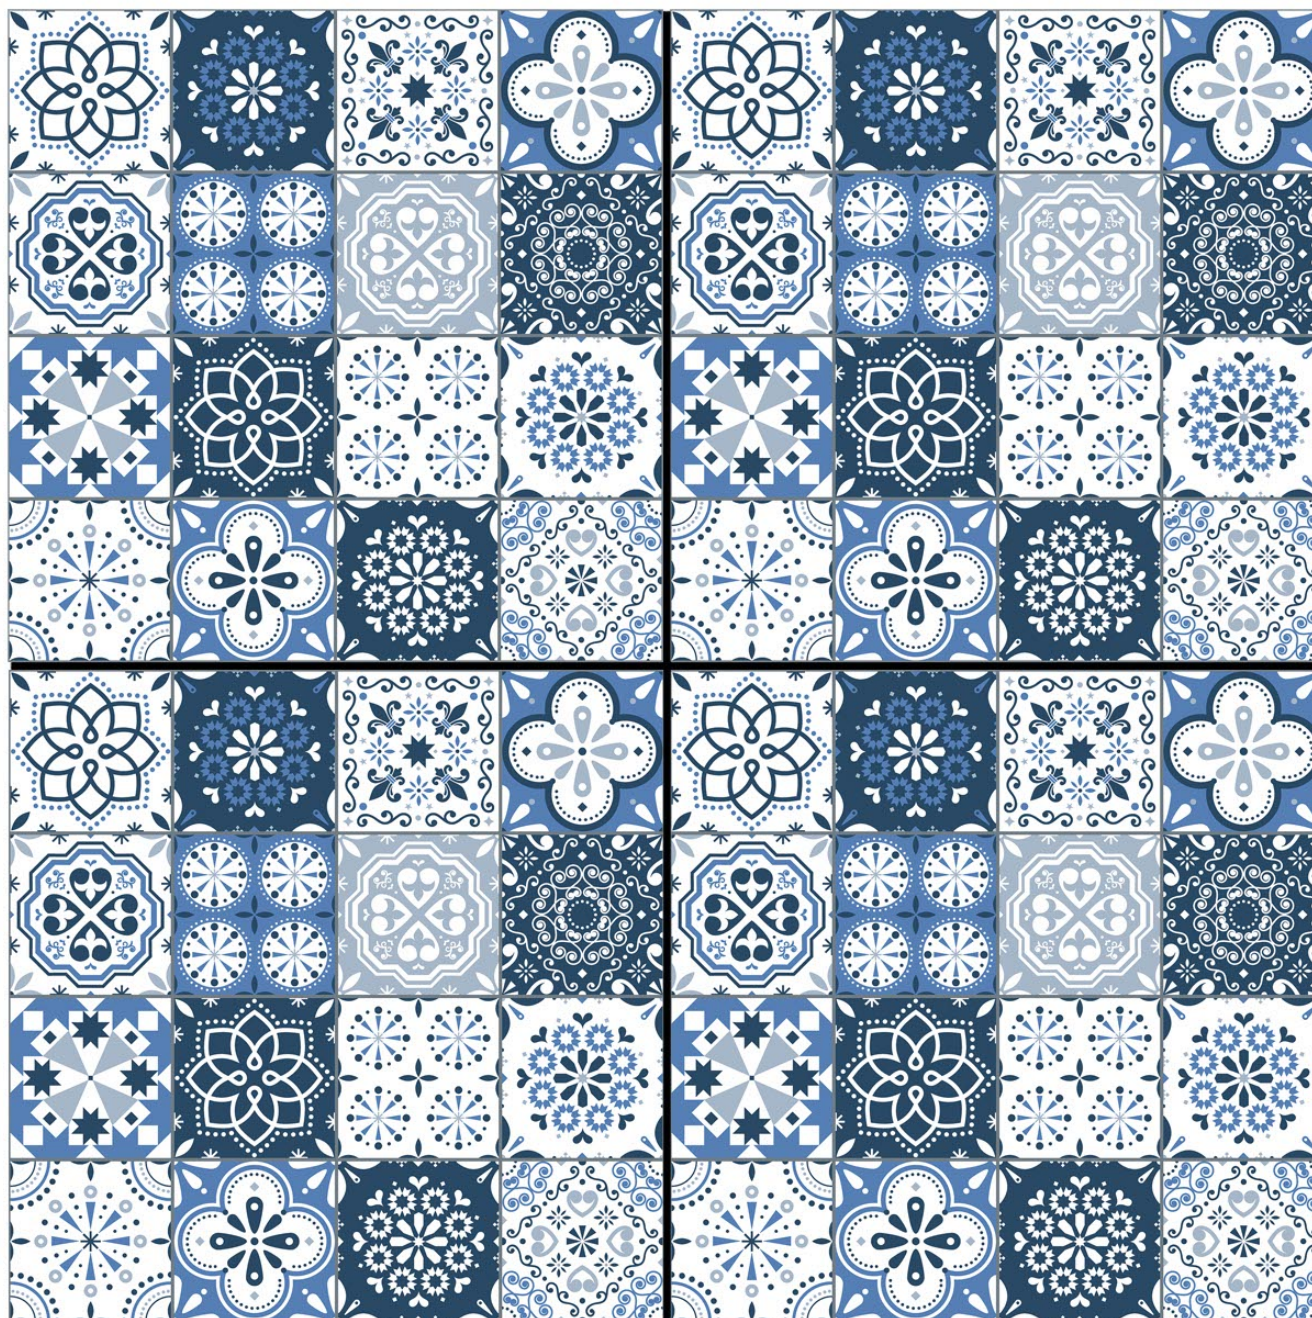




400X400MM | Digital Vitrified Parking Tiles |



6035

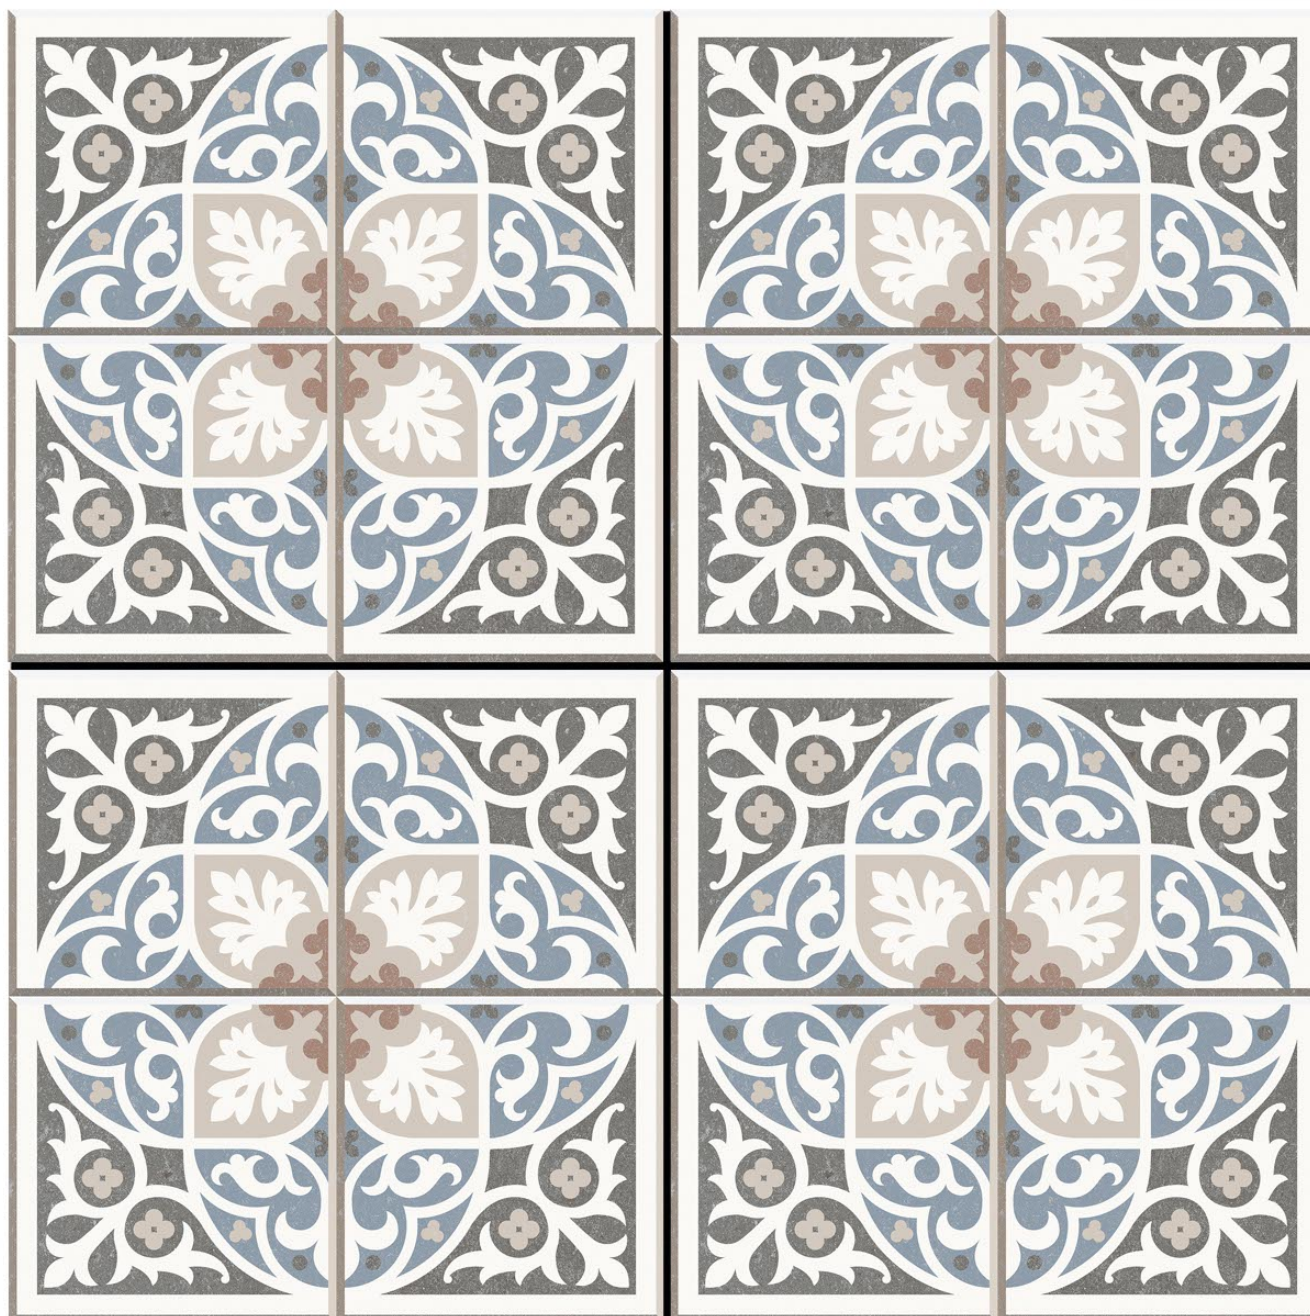




400X400MM | Digital Vitrified Parking Tiles |



6037

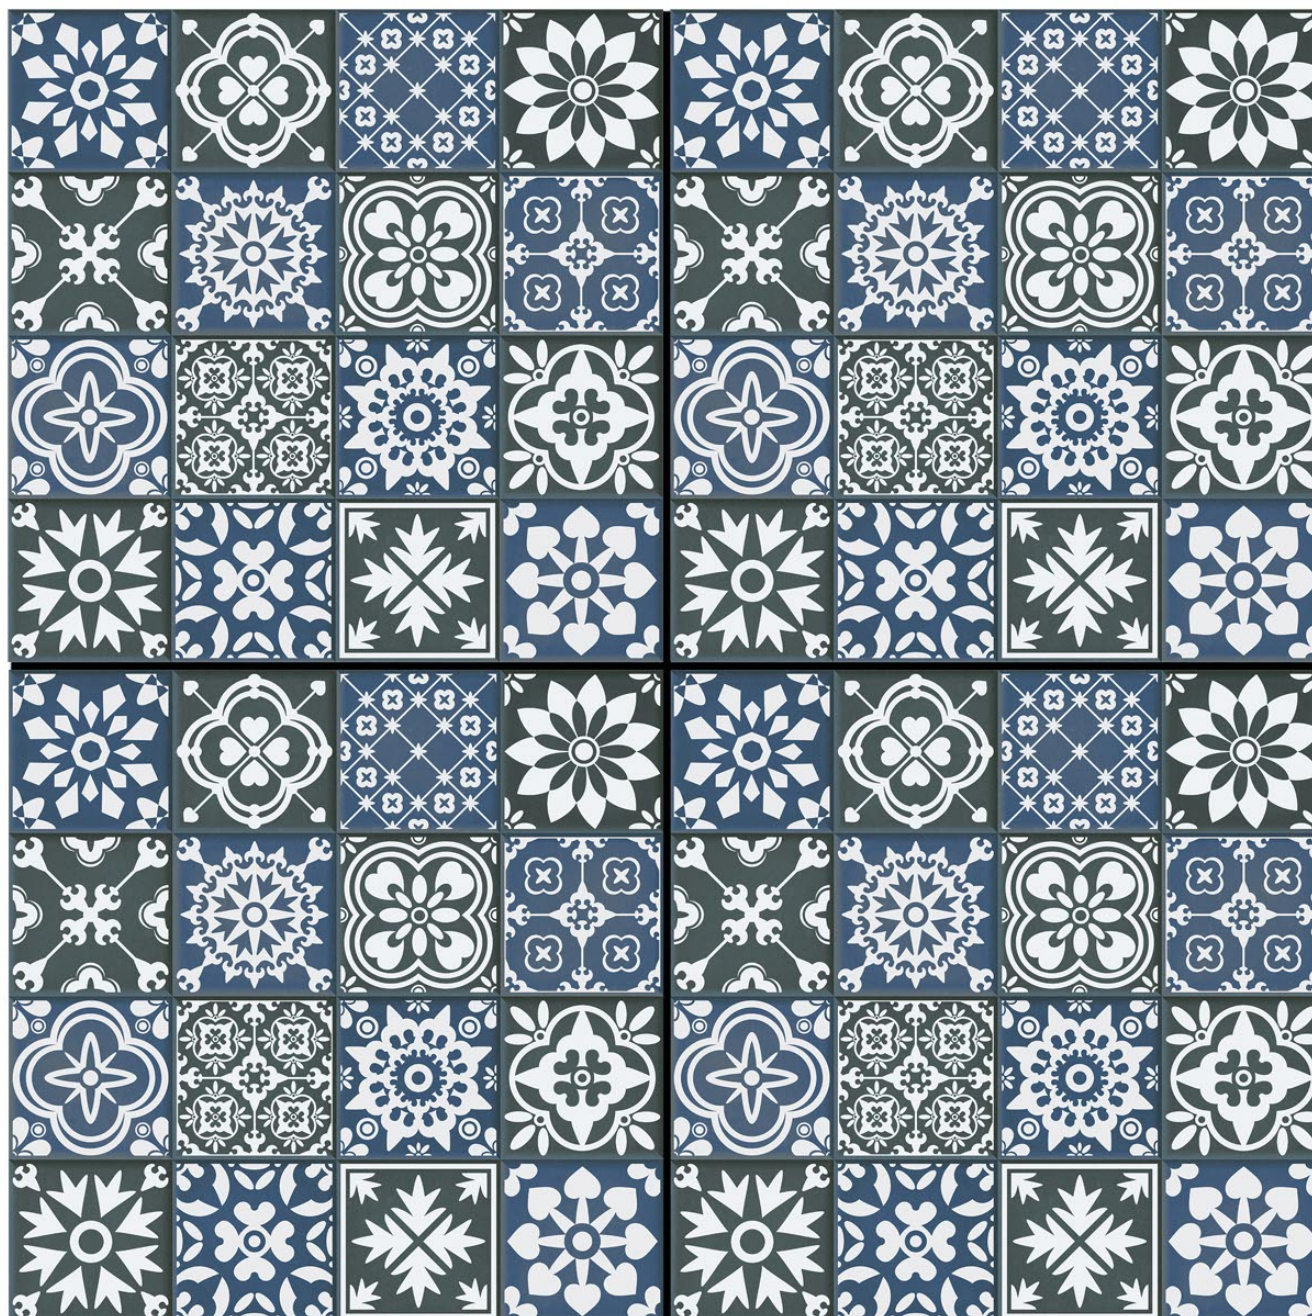




400X400MM | Digital Vitrified Parking Tiles |



6038

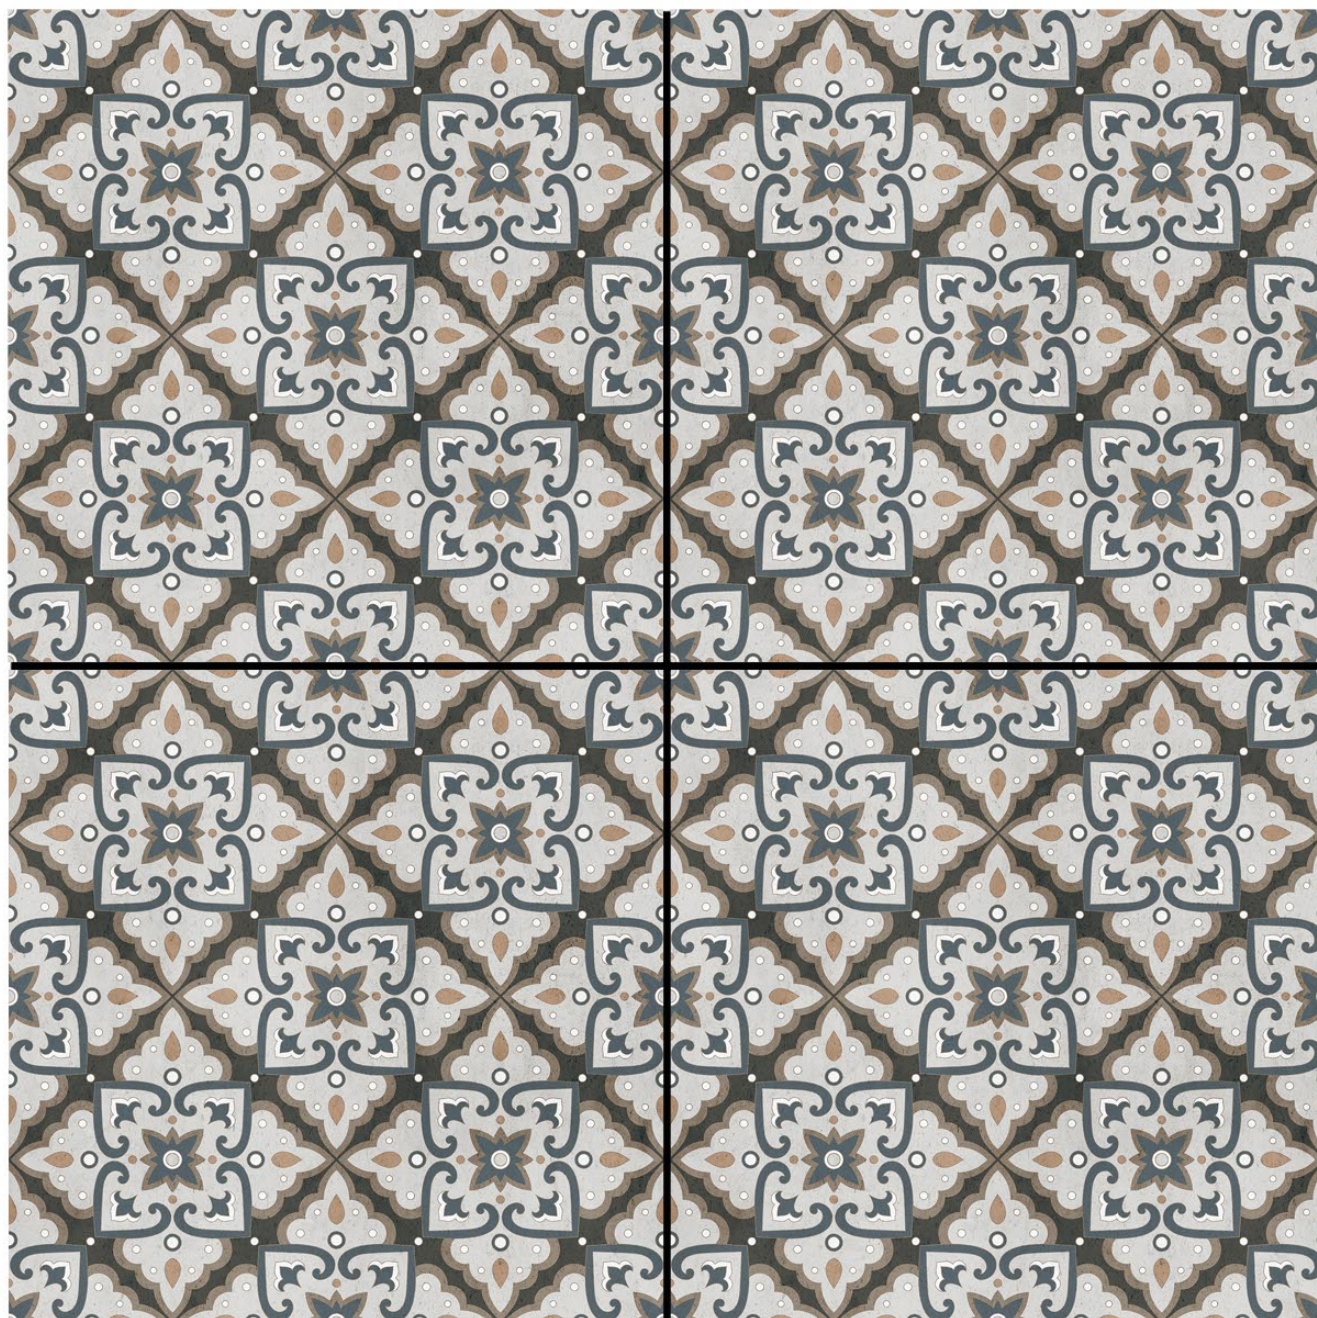




400X400MM | Digital Vitrified Parking Tiles |




6039



400X400MM | Digital Vitrified Parking Tiles |

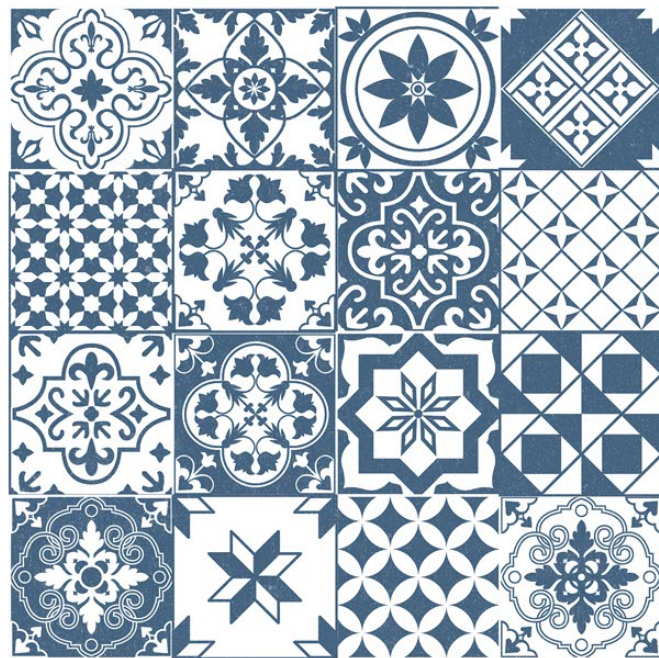


6040

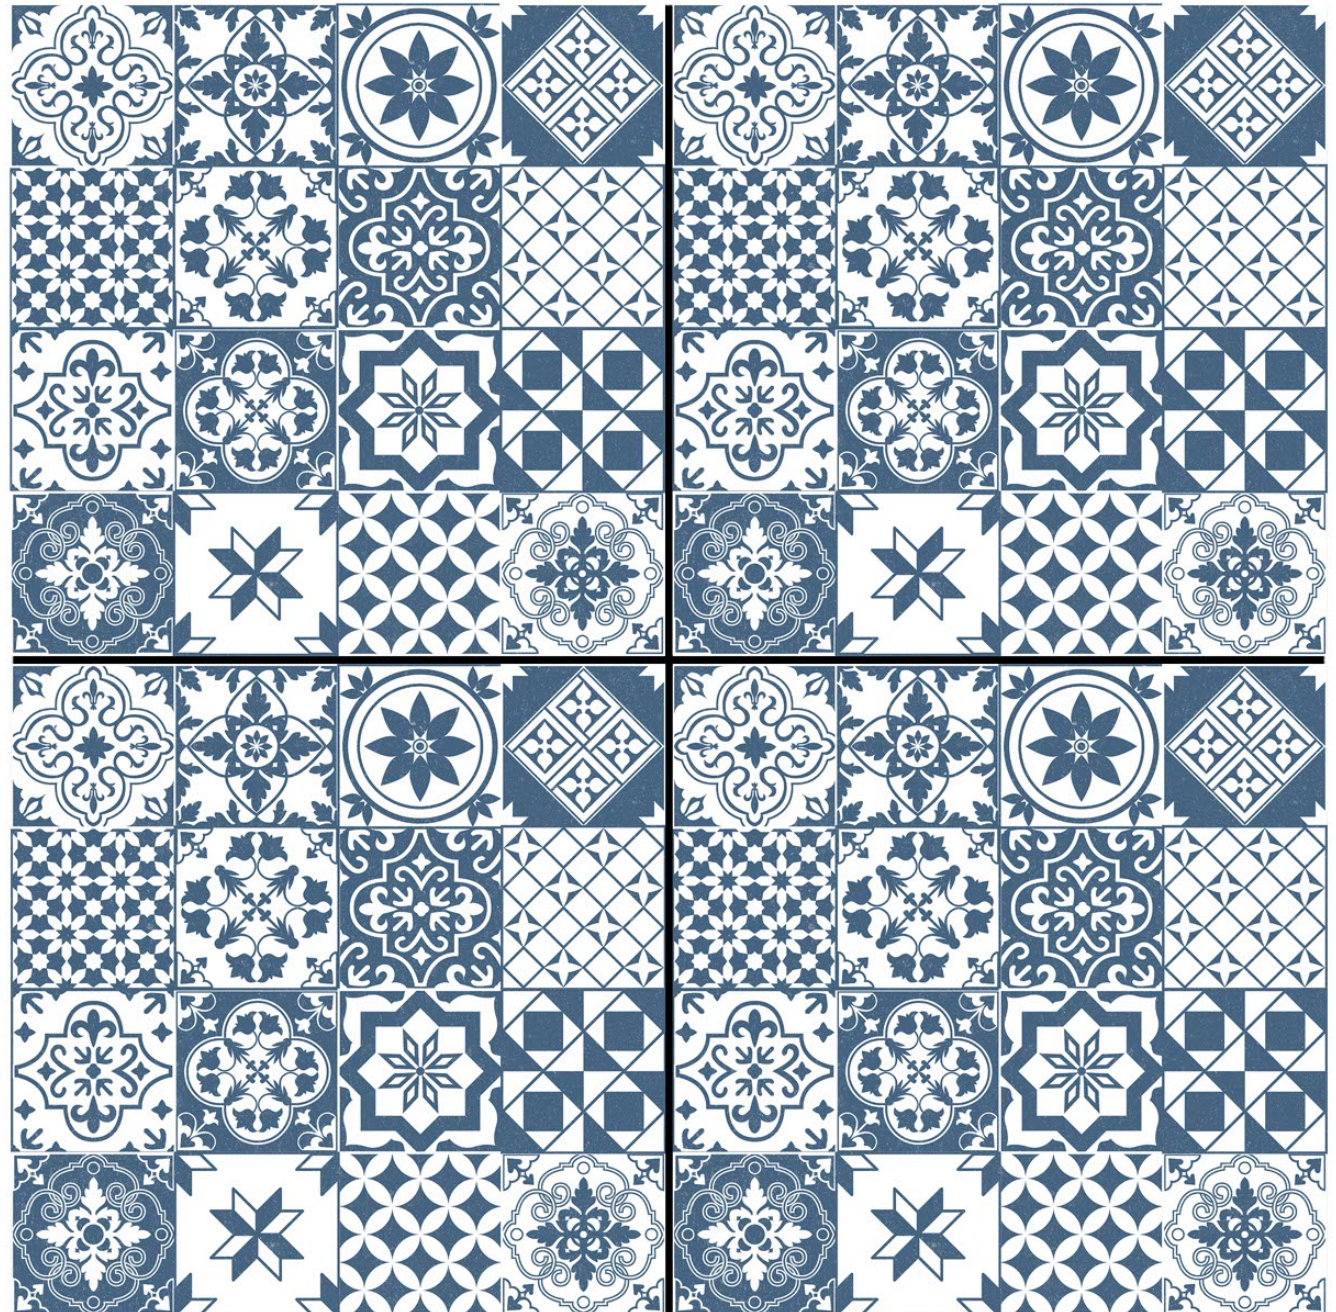




400X400MM | Digital Vitrified Parking Tiles |

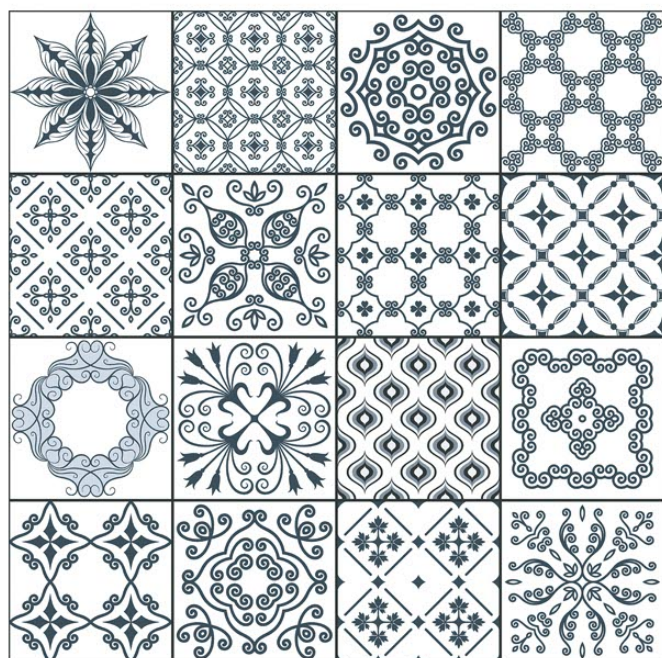

6041

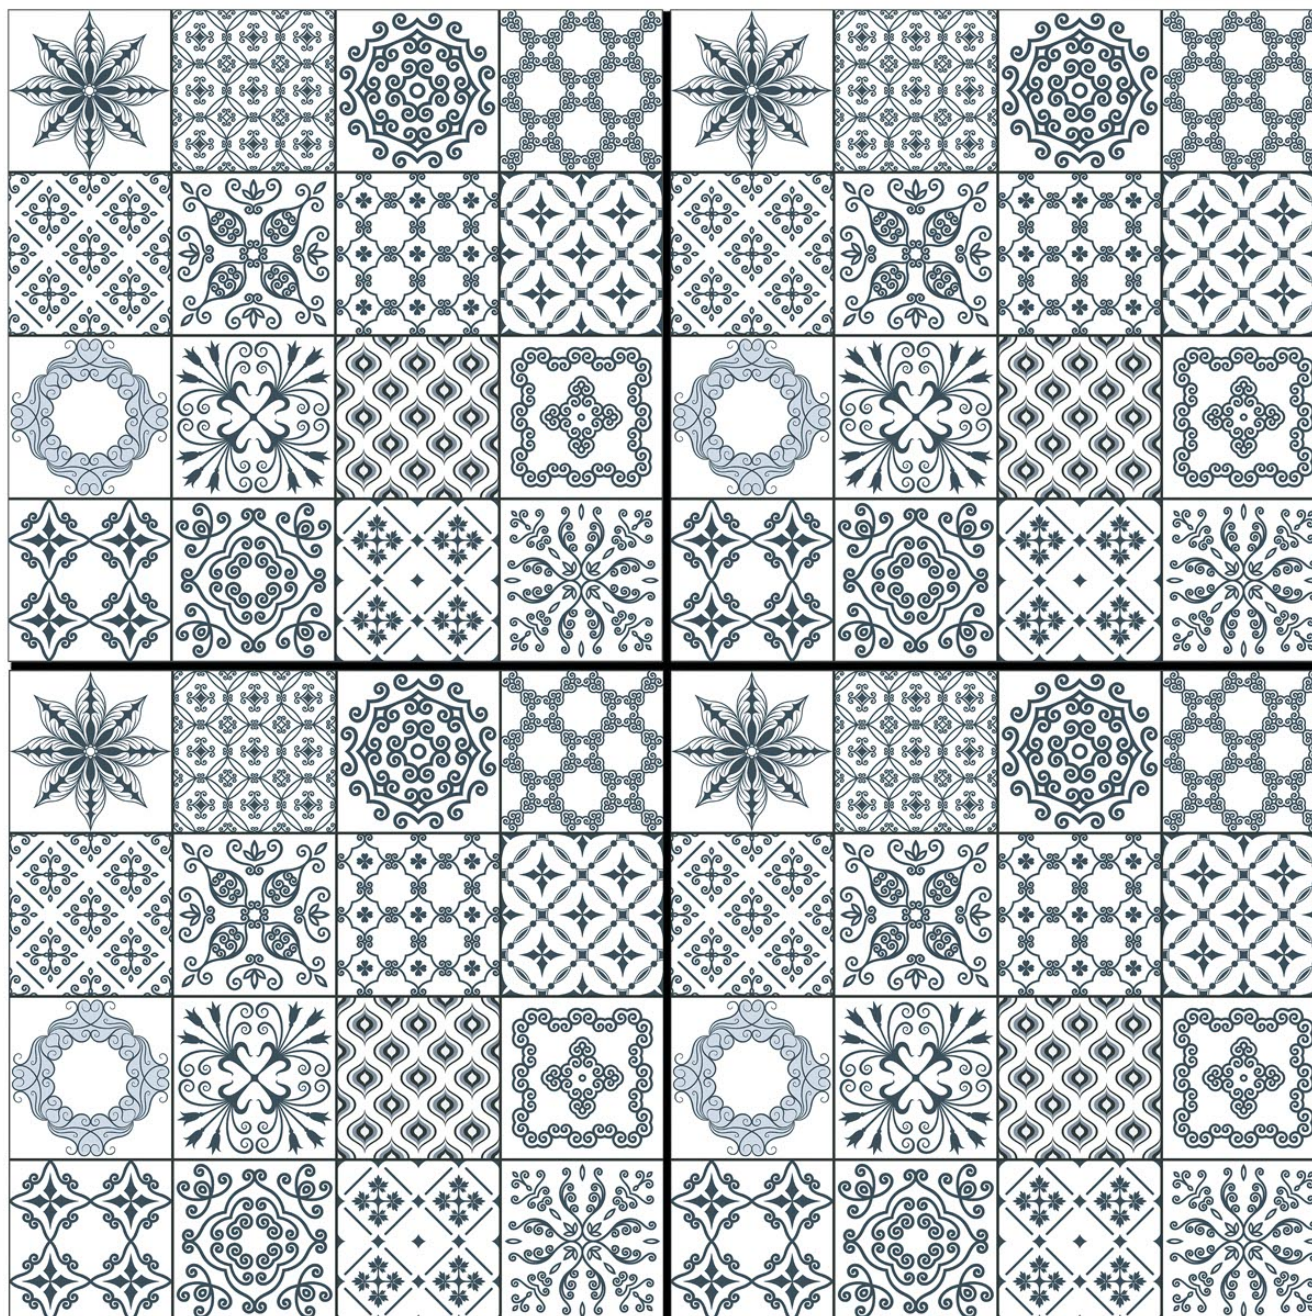



400X400MM | Digital Vitrified Parking Tiles |



6042



TECHNICAL SPECIFICATION FOR PARKING TILES

SR. NO.	CHARACTERISTICS	IS 15622:2017 GROUP BIA E ≤ 0.08	ISO 13006:2018 GROUP BIA EV ≤ 0.5 %	EN 14411:2016 GROUP BIA EV ≤ 0.5 %	TEST METHOD	VALUE
A - DIMENSION & SURFACE QUALITY (WHICH EVER IS LESS IS APPLICABLE)						
i	Length & Width	±0.1%	± 0.3% OR ± 1.0 mm	± 0.6% OR ± 2.0 mm	ISO 10545 - 2 IS 13630 (Part 1)	± 0.1%
ii	Thickness	± 5.0%	± 5.0% OR ± 0.5 mm	± 5.0% OR ± 0.5 mm		± 4%
iii	Straightness Of Side	±0.1%	± 0.3% OR ± 0.8 mm	± 0.5% OR ± 1.5 mm		± 0.1%
iv	Rectangularity	±0.1%	± 0.3% OR ± 1.5 mm	± 0.5% OR ± 2.0 mm		± 0.1%
v	Surface Flatness					
a	Center Curvature (%)	± 0.5 %	± 0.4% OR ± 1.8 mm	± 0.5 % OR ± 2.0 mm		± 0.2 %
b	Edge Curvature (%)	± 0.5 %	± 0.4% OR ± 1.8 mm	± 0.5 % OR ± 2.0 mm		± 0.2 %
c	Corner Warpage (%)	± 0.5 %	± 0.4% OR ± 1.8 mm	± 0.5 % OR ± 2.0 mm		± 0.2 %
vi	Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects		Min. 95 % of tiles will be free from visible defects
B - PHYSICAL PROPERTIES						
i	Water Absorption	Av ,0.08 < E ≤ 3.0% Individual 3.3 max	Av ,0.5 < E v< 3.0% Individual 3.3 max	Av ,<3.0% Individual 3.3 max	ISO 10545-3 IS 13630 (Part 2)	2-3 %
ii	Modulus Of Rupture [n/mm2]	Av 30, Individual 27 min	Av 30, Individual 27 min	Av 30, Individual 27 min	ISO 10545-4 IS 13630 (Part 6)	>35
iii	Breaking Strength In N	1100	1100	1100		>1200
iv	Moisture Expansion In Mm/m	Max 0.02	0.06% /0.6mm/m	0.06% /0.6mm/m	ISO 10545-10 IS 13630 (Part 3)	Max 0.02
viii	Resistance To Surface Abrasion Of Glazed Tiles (Class I To V)	Min Class II	Abrasion Class and Cycle passed	Abrasion Class and Cycle passed	ISO 10545-7 IS 13630 (Part 11)	Class III (Depending on Surface/Texture)
vi	Coefficient Of Linear Thermal Expansion From Embiant Temperature To 100 0 C	7 X 10 ⁻⁶ K ⁻¹ max	9 X 10 ⁻⁶ K ⁻¹ max	9 X 10 ⁻⁶ K ⁻¹ max	ISO 10545-8 IS 13630 (Part 4)	7 X 10 ⁻⁶ K ⁻¹ max
vii	Thermal Shock Resistance	10 cycle min	10 cycle min	10 cycle min	ISO 10545-9 IS 13630 (Part 5)	10 cycle Passed
viii	Crazing Resistance	Min 4 cycle at 7.5 bar	2 Cycle (@ 5 bar))	2 Cycle (@ 5 bar))	ISO 10545-11 IS 13630 (Part 9)	6 cycle passed
ix	Frost resistance		Required	Required	ISO 10545-12 IS 13630 (Part-10)	Not Required for Indore Use
x	Impact Resistance	0.55	0.55	0.55	ISO 10545-5 IS 13630 (Part 14)	>0.55
	Bulk Density	Min 2.0			ISO 10545-3 IS 13630 (Part 2)	Min 2.0

C - CHEMICAL PROPERTIES						
i	Stain Resistance	Min Class I	Min Class 3	Min Class 3	ISO 10545-14 IS 13630 (Part 8)	Class 1
ii	Resistance To Household Chemicals	Class AA	Min Class B	Min Class B	ISO 10545-13 IS 13630 (Part 8)	Class AA
iii	Resistance To Acid And Alkalies				ISO 10545-13 IS 13630 (Part 8)	Class AA

PACKING DETAILS

SIZE	PIECES / BOX	COVERAGE AREA / BOX		WEIGHT / BOX
40x40cm	5	8.61 sq. ft.	0.80 sq. mtr	18.5 Kg (approx)

Note: Color shown in catalog may vary with the original tile. Slight shade & size variation is an inherent property of Ceramic / Vitrified tiles.

ara tiles pvt. ltd.

Village Thikariya,
Tah-Reengus,
District - Sikar.
Rajasthan - 332411.

 +91 73579 55444
+91 73578 55444

